


MIRO 6.2 pluggable Plug-in module Optocoupler

IN: 24 VDC - OUT: 24 VDC / 6 A

Transistor 6 A
24 V DC

[Link to Product](#)

Illustration

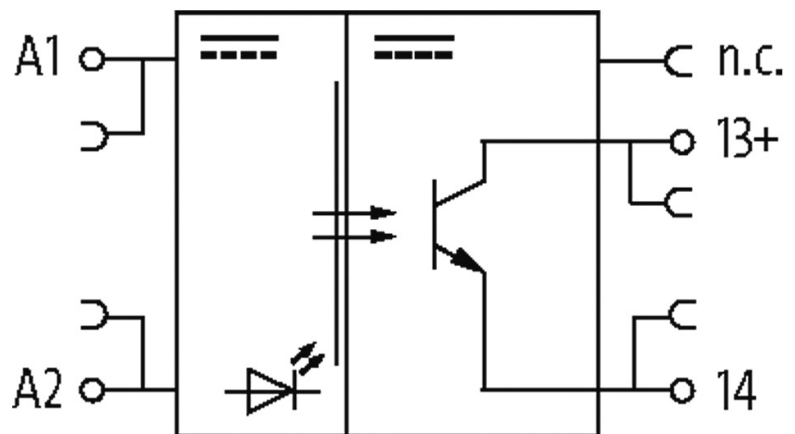

Product may differ from Image

Input

Connection voltage - current	24 V DC (18...30 V DC) - 9 mA
LED display	LED (yellow)

General data

Test isolation voltage	50 V
Surge voltage resistance	2.5 kV

Protection	IP20
Mounting method	pluggable
Dimensions H x W x D	15x5x28 mm
Temperature range	-25...+50 °C

Output

Switching time ON/OFF	15/31 µs
Switching voltage	3...30 V DC
Switching current per output	10 mA...6 A
Saturation voltage (across output)	max. 240 mV
Switching frequency	max. 500/50 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879535175
eClass	27371604
Packaging unit	1