

## MVP12, 8XM12, MOSA, PLUG. CAP SCT.

With potent. sep.

pluggable connection cap

PIN 1: +24 V or PE selectable by plug links

Potential separation as option



with LED for digital PNP-signals 24 V DC

quick connection elements included


Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration



for 2 signals per port

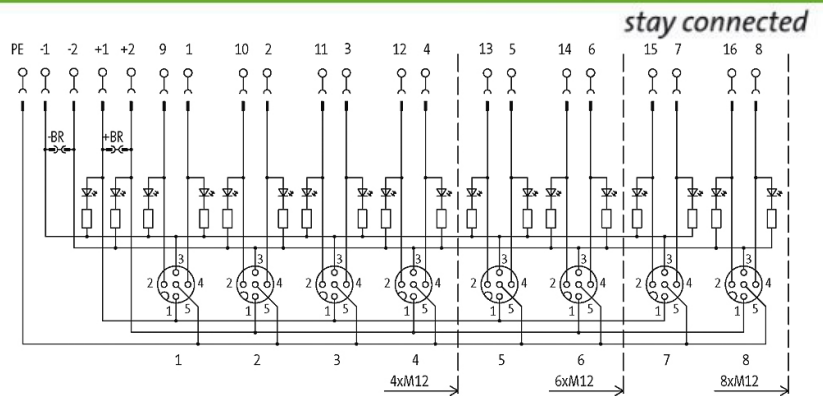

Product may differ from Image

### Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED display	LED (green): Power / LED (yellow): (S1/S2)

### Technical Data

Operating voltage	24 V DC
Signal per port	2
Operating current per contact	max. 4 A
Total current	max. 2 × 8 A
Connection cross section	0.25...0.5 mm <sup>2</sup>
Housing	Plastic, flame retardant
Protection	IP67 inserted and tightened (EN 60529)
Locking of ports	Cap nut

### General data

Temperature range	-20...+80 °C
Dimensions H × W × D	43×50.2×170 mm

### Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879057646
eClass	27279219
Packaging unit	1