

## MVP12, 4XM12, MOSA, CON. CAP



With potent. sep.

pluggable connection cap  
 Potential separation as option  
 with LED for digital PNP-signals 24 V DC  
 quick connection elements included


Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration



for 2 signals per port

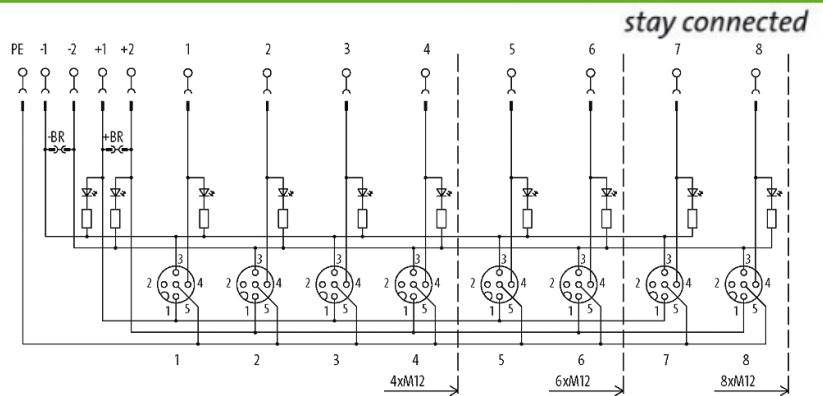

Product may differ from Image

### Contact Layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED display	LED (green): Power / LED (yellow): (S1/S2)

### Technical Data

Operating voltage	24 V DC
Signal per port	2
Operating current per contact	max. 4 A
Total current	max. 2 × 8 A
Connection cross section	0.25...0.5 mm <sup>2</sup>
Locking of ports	Cap nut
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant

### General data

Temperature range	-20...+80 °C
Dimensions H × W × D	43×50.2×122 mm

### Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879057509
eClass	27279219
Packaging unit	1