


## MIRO 6,2 Valvecontrol 24VDC/1ms



In:24VDC OUT :24VDC/1,5A

Switching accelerator: 1 ms/24 V DC  
Screw terminals

### [Link to Product](#)

#### Illustration

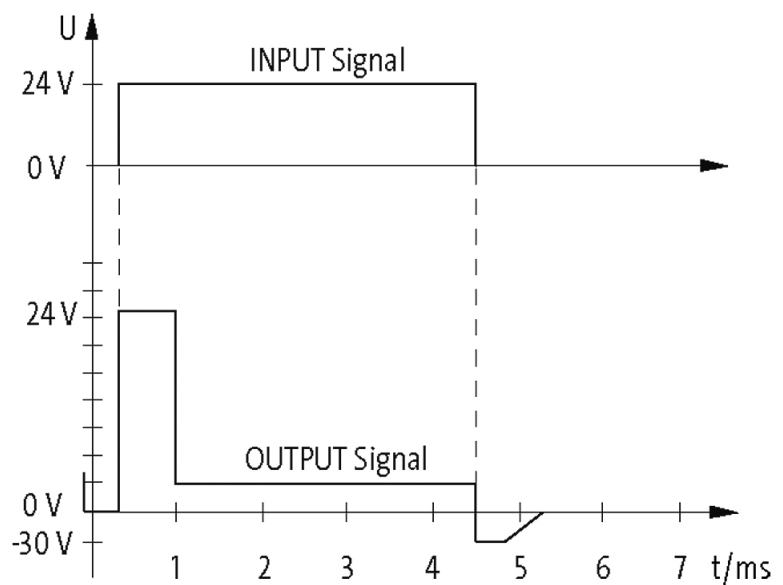

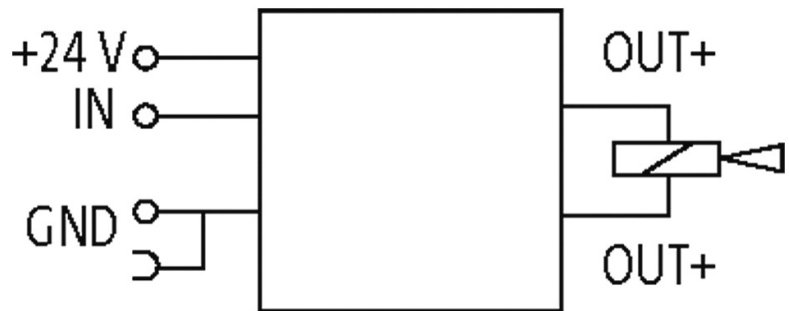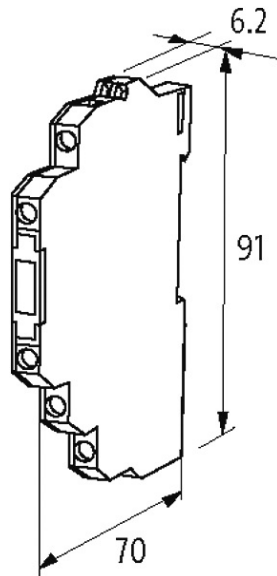

Product may differ from Image

### Input

Input voltage	24 V DC (18...30 V DC)
Input current	approx. 13 mA

### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -25...+50 °C)
Dimensions H × W × D	91×6.2×70 mm

### Output

Output current	Impulse: 1.5 A (1 ms); continuous output current: 380 mA (3.5 V)
Switching frequency	max. 20 Hz

### Commercial data

country of origin	CZ
customs tariff number	85437090
EAN	4048879571876
eClass	27210990
Packaging unit	10