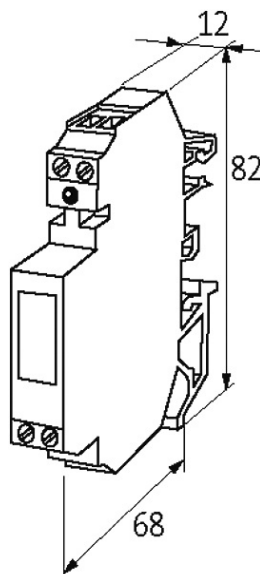



RMMDUE 11/24 DC INPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 6 A

1 relay; 1 NO/NC contact
5 A
24 V AC
with minus plug link

When the max. switching voltage/current is exceeded the gold plating is destroyed. Max. current is then 5 A.

[Link to Product](#)**Illustration**

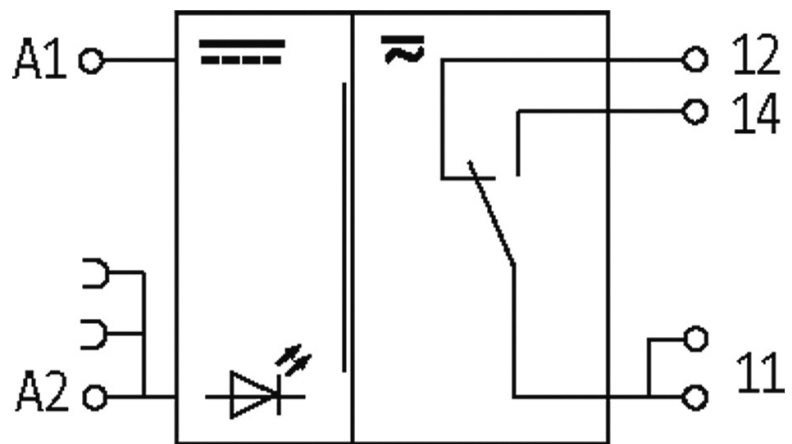

Product may differ from Image

Input

Connection voltage - current	24 V DC (19.2...30 V DC) - 17 mA
Plug link (supplied)	Art-No. 90960
LED display	LED (yellow)

Utilization category

AC-1	5 A (24/110/230 V AC)
AC-15	3 A (24/110/230 V AC)
DC-13	1.3 A (24 V DC); 0.25 A (110 V DC); 0.10 A (230 V DC)

General data

Mech./ elect. life	100 000 000 switching cycles/load dependent
Test isolation voltage	4 kV
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Dimensions H x W x D	82x12x68 mm

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 20 mA
Min. load current	1 mA
Power rating (voltage dependent)	max. 1 500 VA/180 W
Switching frequency	max. 15 Hz
Contact material	Ag Ni 0.15 hv; Ag hv
Energize/release/contact bounce time	10/10/1 ms

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879027755
eClass	27371001
Packaging unit	1

