
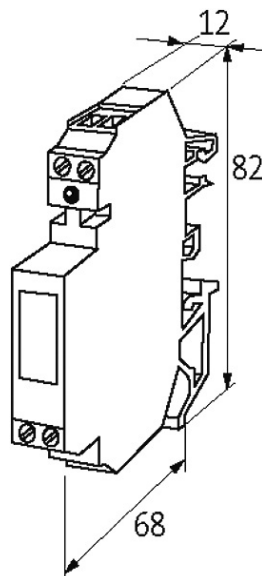


RMMDUE 11/230 V AC INPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NO/NC contact
5 A
230 V AC
with minus plug link

[Link to Product](#)**Illustration**

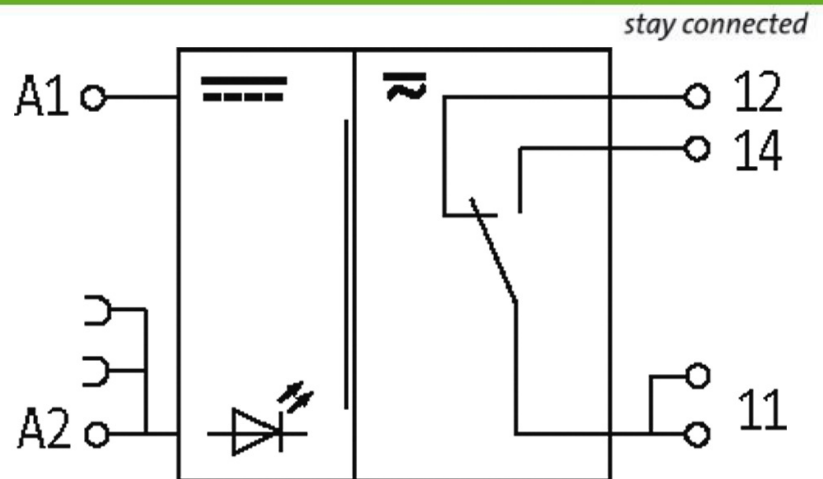

Product may differ from Image

Input

Connection voltage - current	230 V AC/DC (195...253 V AC/DC) - 4.5 mA
LED display	LED (yellow)

Utilization category

AC-1	5 A (24/110/230 V AC)
AC-15	4 A (24/110/230 V AC)
DC-13	2 A (24 V DC); 0.25 A (110 V DC); 0.1 A (230 V DC)

General data

Mech./elect. life	100 000 000 switching cycles/load dependent
Test isolation voltage	4 kV
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Dimensions H × W × D	82×12×68 mm

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 5 A
Min. load current	1 mA
Power rating (voltage dependent)	max. 1 500 VA/180 W
Switching frequency	max. 15 Hz
Contact material	Ag Ni 0.15 hv; Ag hv
Energize/release/contact bounce time	10/10/1 ms

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879027748
eClass	27371001
Packaging unit	1