


MIRO TR 24VDC SK 5P OPTO-COUPLER MODULE


IN: 48 VDC - OUT: 35 VDC / 2 A

Transistor 2 A
 24 V DC
 Short-circuit protected
 Switching frequency: max. 1 kHz
 Screw terminals

[Link to Product](#)

Illustration

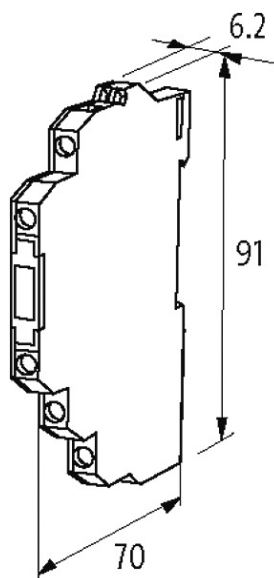

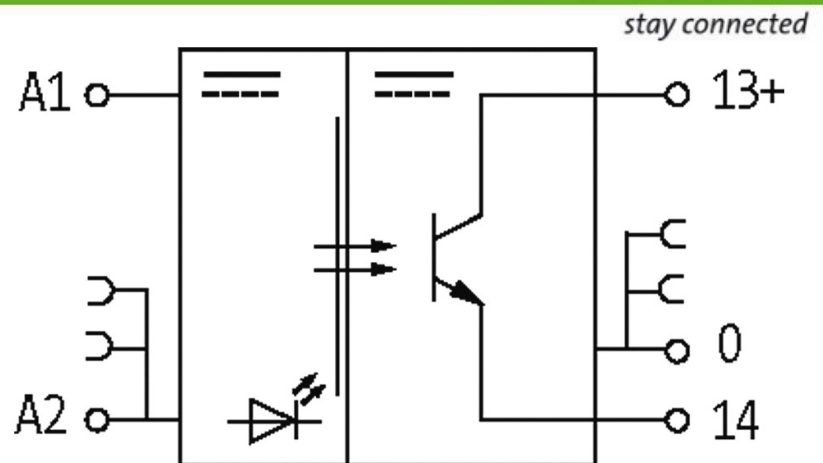

Product may differ from Image

Approvals



Input

Voltage range ON	10...48 V DC
Voltage range OFF	0...5 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H x W x D	91x6.2x70 mm

Output

Switching voltage	10...35 V DC
Switching current per output	1 mA...2 A (short-circuit protected)
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	90/120 µs
Switching frequency	max. 1 kHz

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879026918
eClass	27371604
Packaging unit	1