


MIRO TR 70-130VAC/DC SK OPTO-COUPLER MODULE



IN: 130 VAC/DC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A
110 V AC/DC
Screw terminals

[Link to Product](#)

Illustration

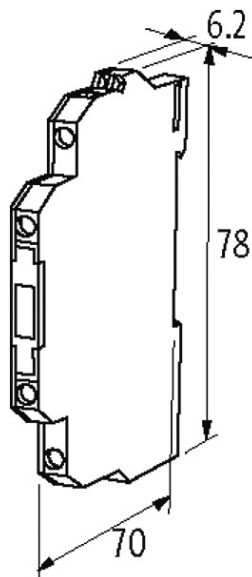

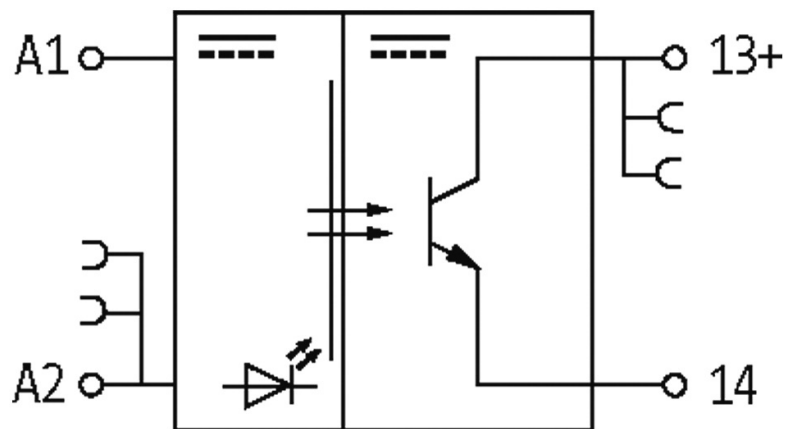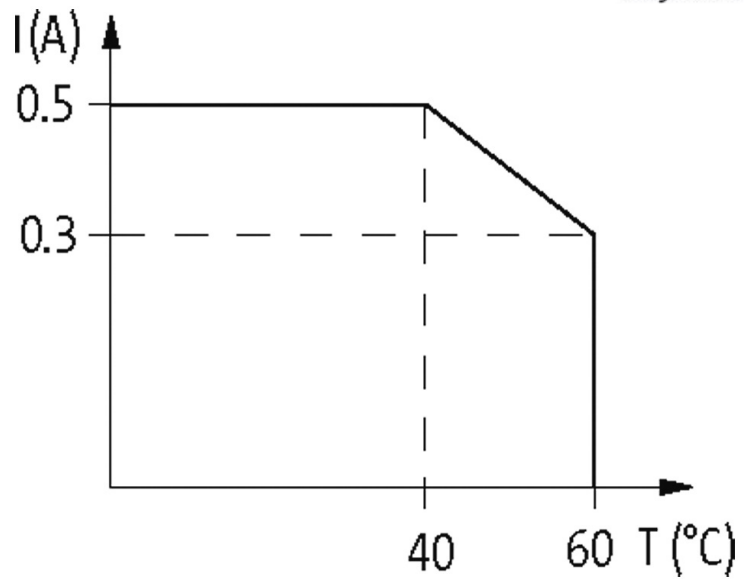

Product may differ from Image

Approvals



Input

Voltage range ON	70...130 V AC/DC
Voltage range OFF	0...30 V AC/DC
Control current	6 mA
LED display	LED (yellow)

General data

Dimensions H x W x D	78x6.2x70 mm
Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Output

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.5 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	100/700 μ s
Switching frequency	max. 500/30 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879026895
eClass	27371604
Packaging unit	1