


## MIRO TH 230VAC SK OPTO-COUPLER MODULE



IN: 250 VAC - OUT: 250 VAC / 0,5A

Triac 0.5 A  
230 V AC  
Screw terminals

### [Link to Product](#)


#### Illustration

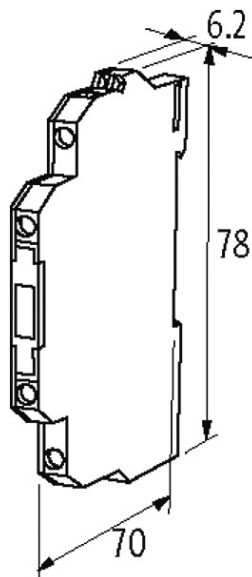

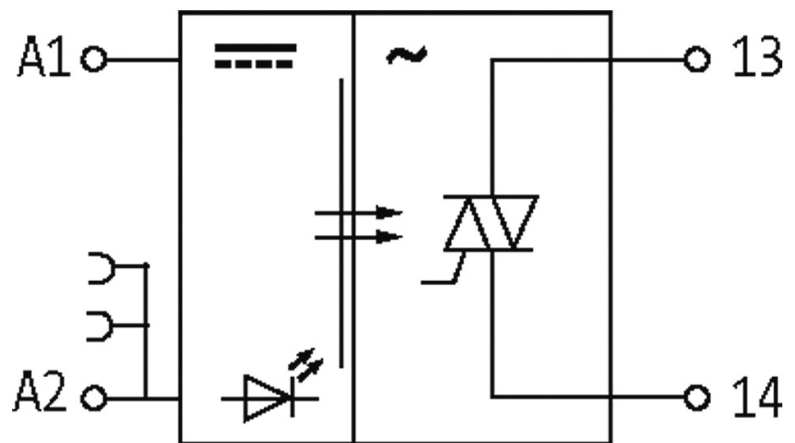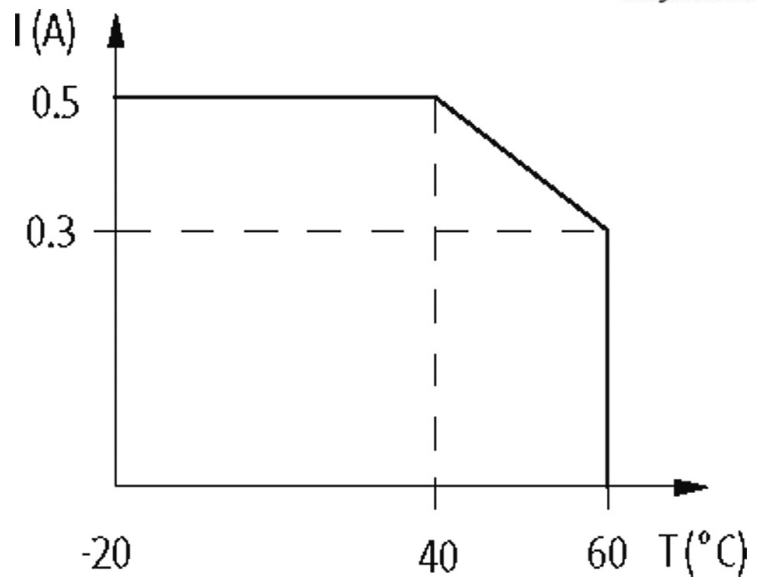

Product may differ from Image

### Approvals

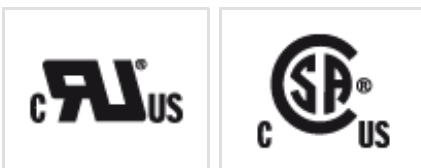

### Input

Voltage range ON	140...250 V AC
Voltage range OFF	0...80 V AC
Control current	7 mA
LED display	LED (yellow)

### General data

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

Dimensions H x W x D 78x6.2x70 mm

**Output**

Switching voltage	12...250 V AC
Switching current per output	2 mA...0.5 A
Saturation voltage (across output)	max. 1.5 V AC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20 Hz, depending on suppression

**Commercial data**

country of origin	CZ
customs tariff number	85414090
EAN	4048879026758
eClass	27371604
Packaging unit	1