
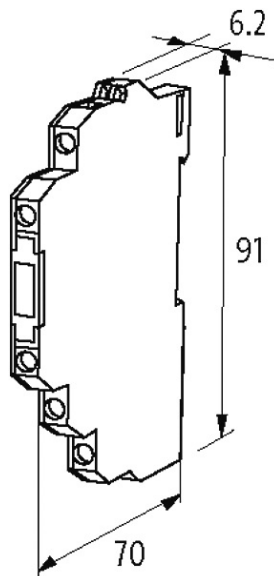
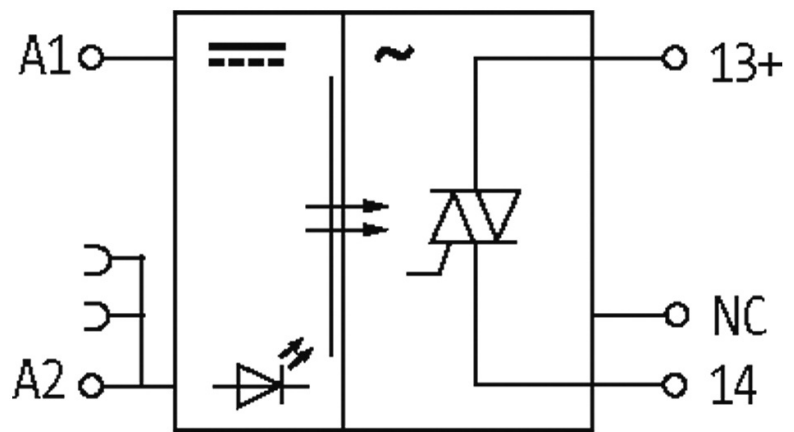


MIRO TH 24VDC SK 5P OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A
24 V DC
with auxiliary common contacts
Screw terminals

[Link to Product](#)**Illustration**

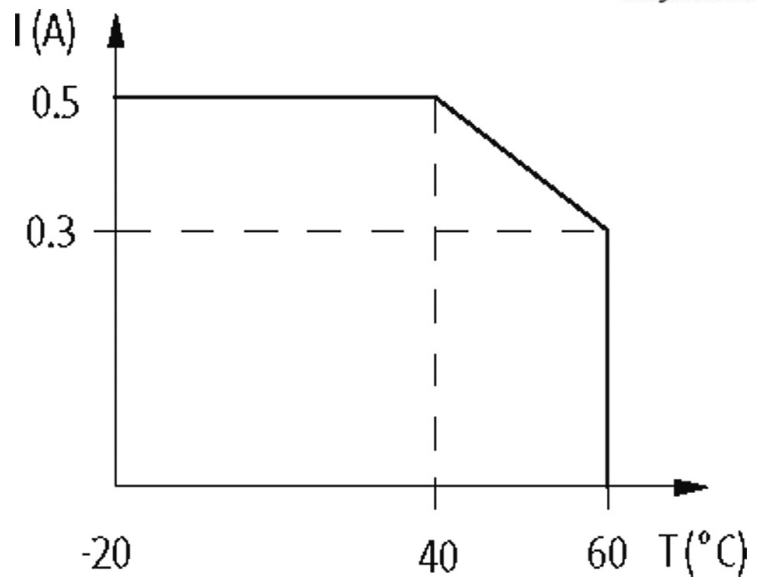

Product may differ from Image

Approvals



Input

Voltage range ON	10...44 V DC
Voltage range OFF	0...3 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H x W x D	91x6.2x70 mm

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Output

Switching voltage	12...250 V AC
Switching current per output	1 mA...0.5 A
Saturation voltage (across output)	max. 1.5 V AC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20 Hz, depending on suppression

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879411325
eClass	27371604
Packaging unit	1