


MIRO 6.2MM OPTO-COUPLER MODULE WITH ISOLATION LINK



IN: 53 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A
24 V DC
Screw terminals

[Link to Product](#)

Illustration

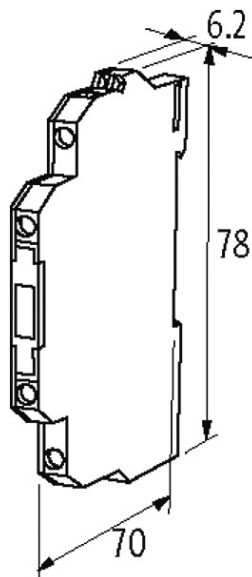

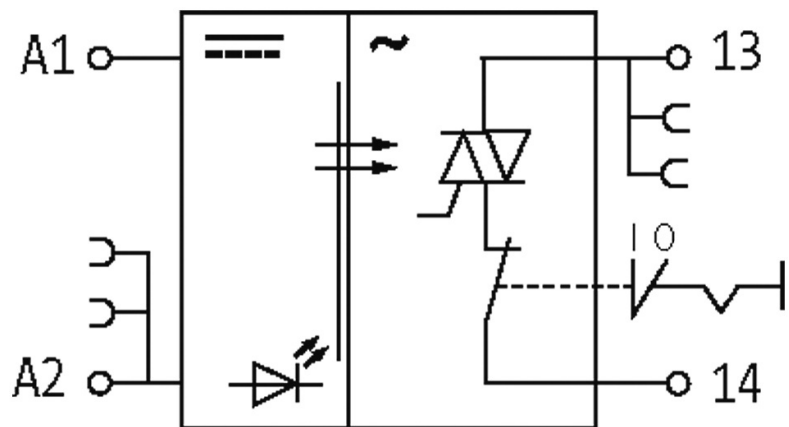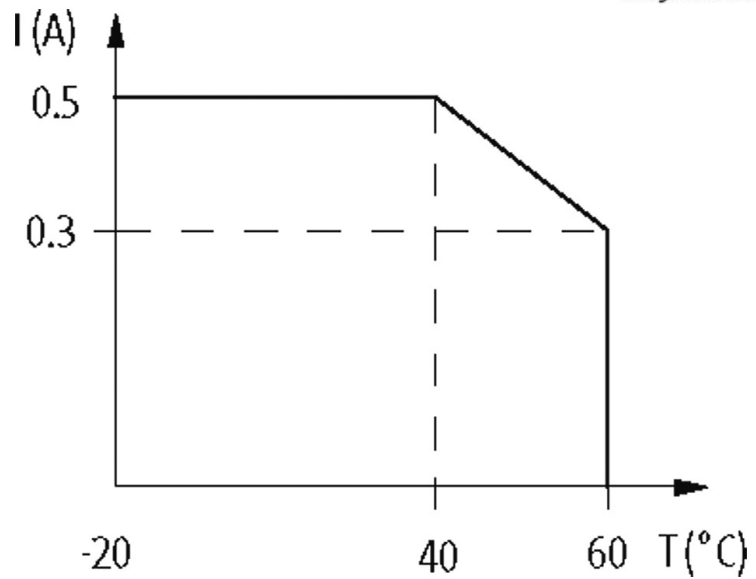

Product may differ from Image

Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	7 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	78×6.2×70 mm

Output

Switching voltage	24...250 V AC
Switching current per output	2 mA...0.5 A
Saturation voltage (across output)	max. 1.5 V AC
Leakage current (output is open)	max. 0.3 mA

Switching time ON/OFF	10/10 ms
Switching frequency	max. 20/1 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879026741
eClass	27371604
Packaging unit	1