


## MIRO 6.2 OPTO-COUPLER MODULE



IN: 230 VAC/DC - OUT: 253 VAC/DC / 0,5 A

Screw terminals  
Multi voltage output  
Transistor 0.5 A  
24...230 V AC/DC

### [Link to Product](#)

#### Illustration

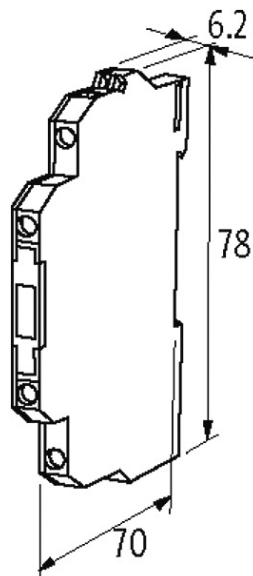

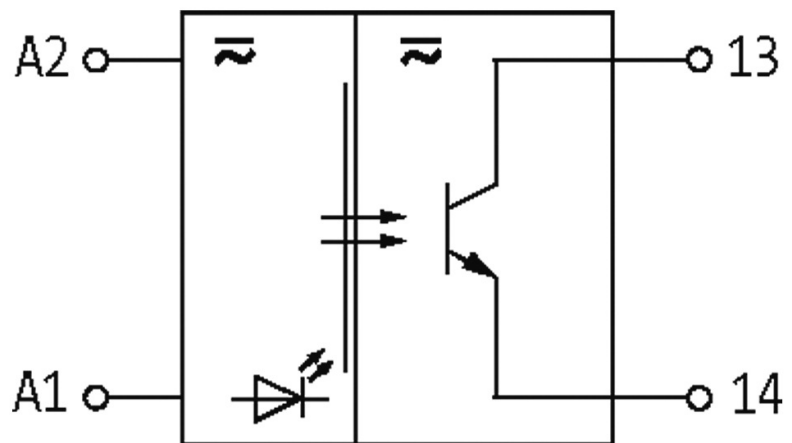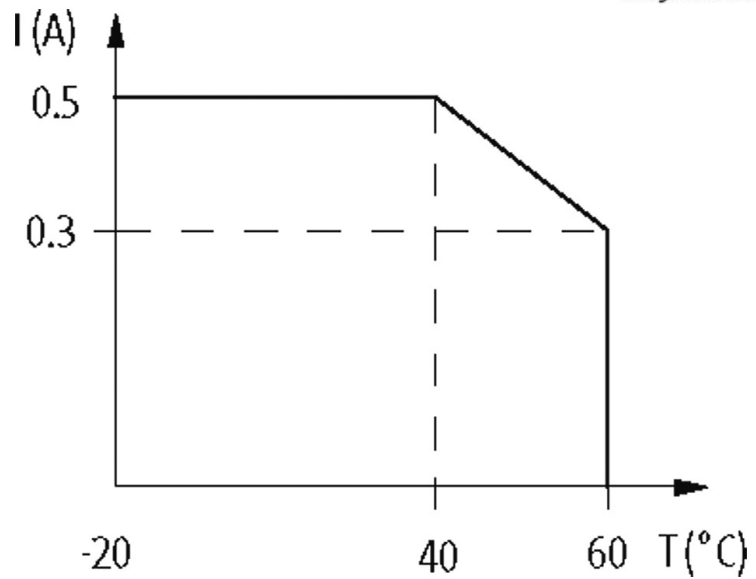

Product may differ from Image

### Input

Voltage range ON	12...230 V AC/DC
Voltage range OFF	0...5 V AC/DC
Control current	max. 5 mA
LED display	LED (yellow)

### General data

Test isolation voltage	2.75 kV
Dimensions H x W x D	78x6.2x70 mm
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

### Output

Switching time ON/OFF	5/15 ms
Switching voltage	10...230 V AC/DC
Switching current per output	1 mA...0.5 A

Saturation voltage (across output)	max. 2.6 V AC/DC
Leakage current (output is open)	max. 20 $\mu$ A
Switching frequency	max. 2.5 Hz

**Commercial data**

country of origin	CZ
customs tariff number	85414090
EAN	4048879026710
eClass	27371604
Packaging unit	1