
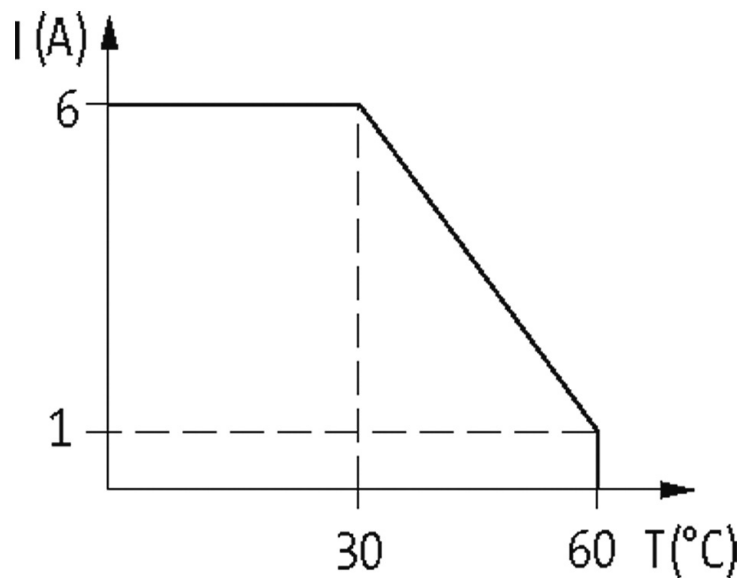
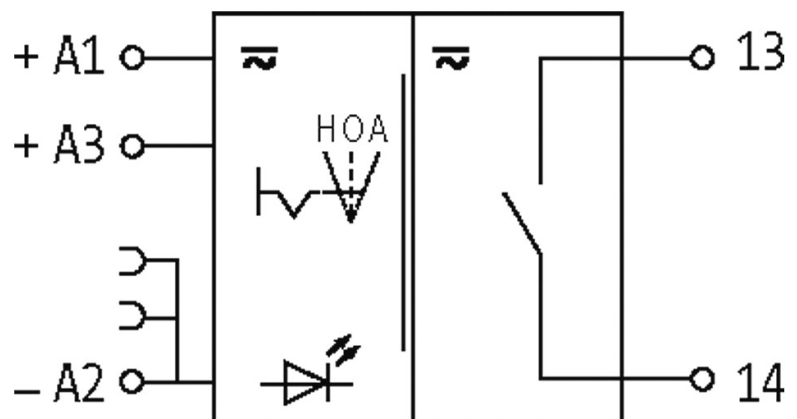
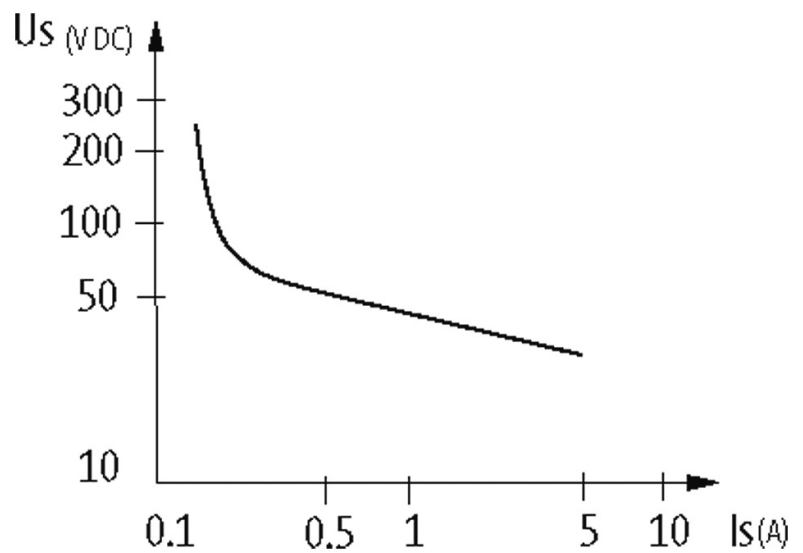


**MIRO 6.2 OUTPUT RELAY WITH TOGGLE SWITCH**

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

1 NO contact  
with protected H-O-A toggle switch  
24 V AC/DC  
Screw terminals

[Link to Product](#)**Illustration**

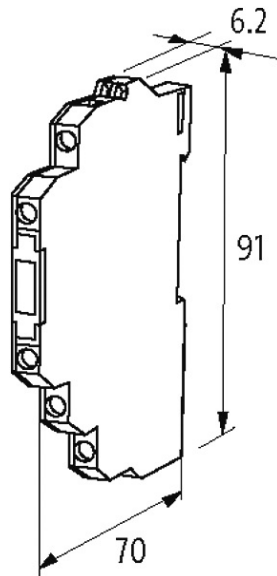

Product may differ from Image

### Input

Connection voltage - current

24 V AC/DC (19.2...28 V AC/DC) - 7 mA

LED display

LED (green): auto mode; LED (red): manual mode

**Utilization category**

|       |   |
|-------|---|
| AC-12 | 6 A (24/110/230 V AC)                             |
| AC-15 | 3 A (24/110/230 V AC)                             |
| DC-13 | 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC) |

**General data**

|                        |  |
|------------------------|--|
| Mech./elect. life      | 20 000 000 switching cycles/load dependent |
| Test isolation voltage | 4 kV; safe separation (EN 60947-1)         |
| Mounting method        | DIN-rail mountable (EN 60715)              |
| Temperature range      | -20...+55 °C                               |
| Dimensions H x W x D   | 91x6.2x70 mm                               |

**Output**

|                                      |                     |
|--------------------------------------|---------------------|
| Switching voltage                    | max. 250 V AC/DC    |
| Switching current per output         | max. 6 A            |
| Min. load current                    | 100 mA (12 V DC)    |
| Power rating (voltage dependent)     | max. 1 500 VA/120 W |
| Switching frequency                  | max. 10 Hz          |
| Energize/release/contact bounce time | 8/20/2 ms           |
| Contact material                     | Ag Sn O2            |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85364900      |
| EAN                   | 4048879024693 |
| eClass                | 27371601      |
| Packaging unit        | 1             |