

INTERFACE TERMINAL RELAY

IN: 24 VDC - OUT: 24VDC / 0.2 A / 20 kHz

Transistor 0.2 A


24 V DC




Control current 2.8 mA (24 V DC)

Spring clamp terminals

[Link to Product](#)

Illustration

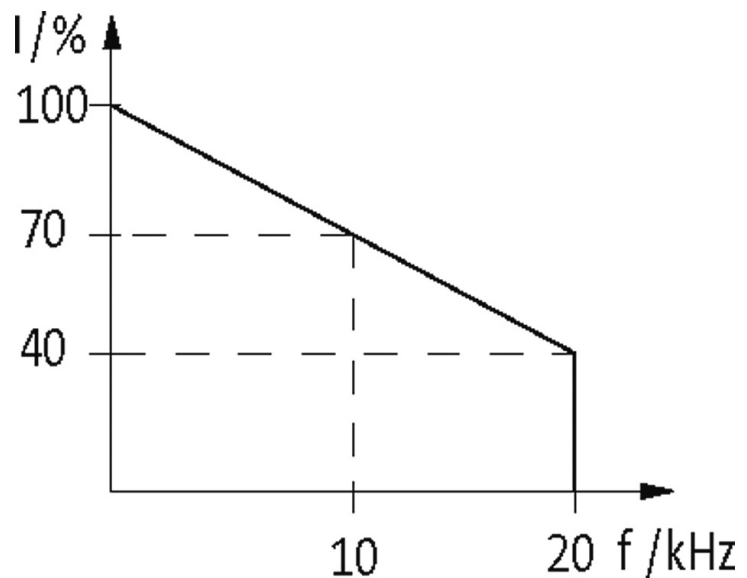

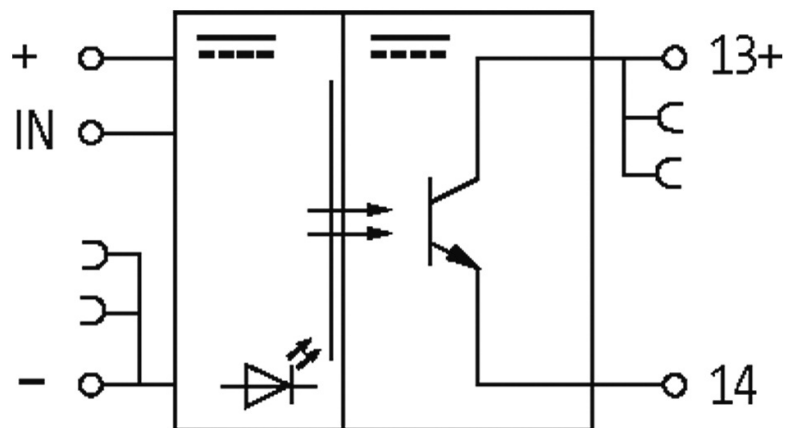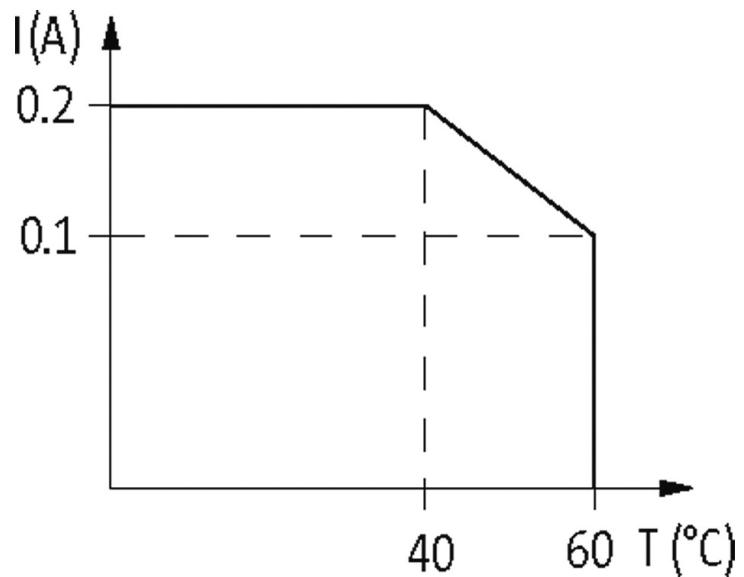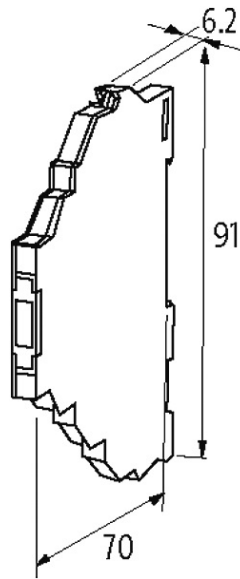

Product may differ from Image

Input

Voltage range ON

16...30 V DC

Voltage range OFF	0...5 V DC
Control current	2.8 mA (24 V DC)
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Dimensions H x W x D	91x6.2x70 mm
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)

Output

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.2 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	14/20 µs
Switching frequency	max. 20 kHz

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879024549
eClass	27371604
Packaging unit	1