
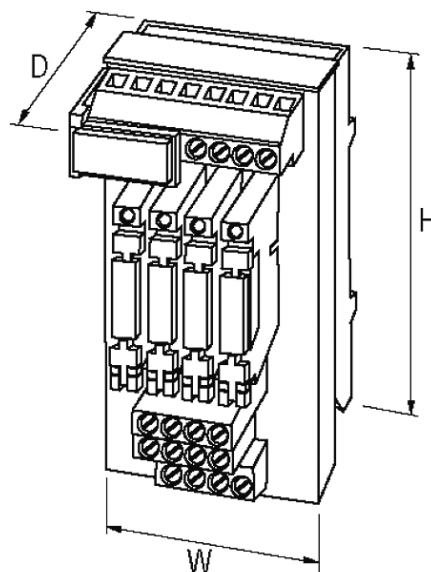


**Article discontinued since March/2018**

Product discontinued

Compact design  
with plug relays  
8 plugged relays; each 1 NO/NC contact  
24 V DC  
Diode + LED

**[Link to Product](#)****Illustration**

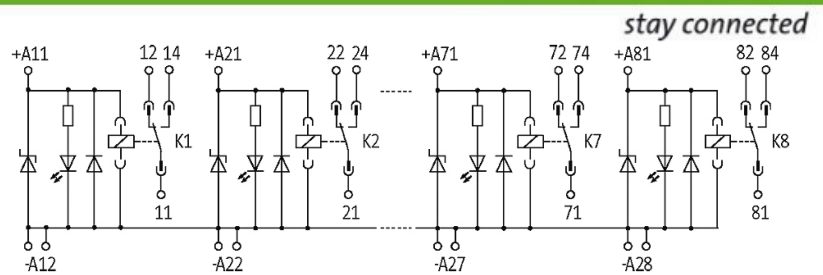

Product may differ from Image

### Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

### Technical Data

Switching voltage	12...250 V AC/DC
Switching current	max. 6 A
Min. load current	10 mA

### General data

Connection	Screw terminals: max. 4 mm <sup>2</sup> , with separate -A2 connections
Test isolation voltage	4 kV (input/output)
Mounting method	DIN-rail mountable (EN 60715)
Dimensions H x W x D	86x67.5x75 mm

### Commercial data

country of origin	CZ
customs tariff number	85437090
EAN	4048879411332
eClass	27371001
Packaging unit	1