

UFL 20 PLUG FOR SIGNAL TRANSFER



Product discontinued


Ribbon cable connector
20-pole

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

[Link to Product](#)

Illustration

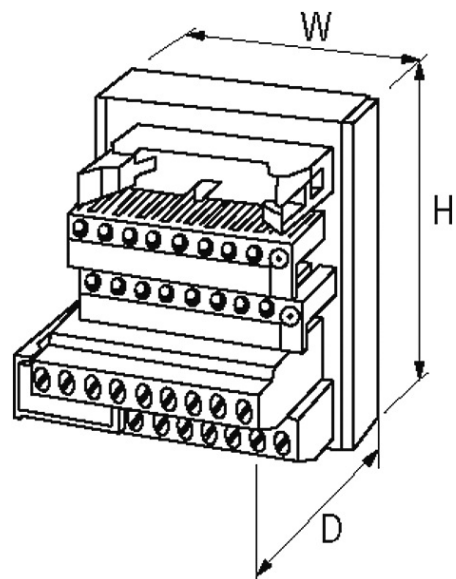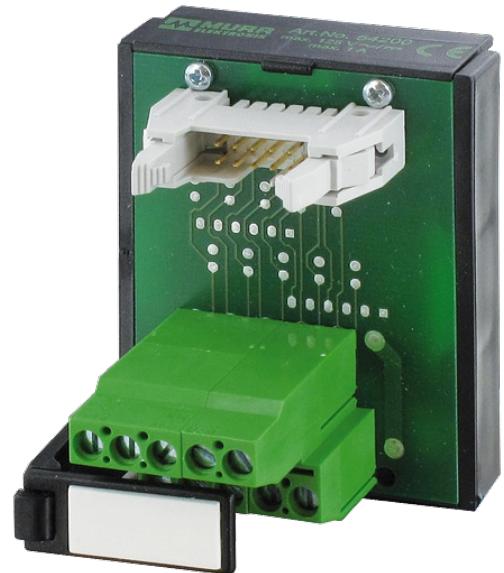

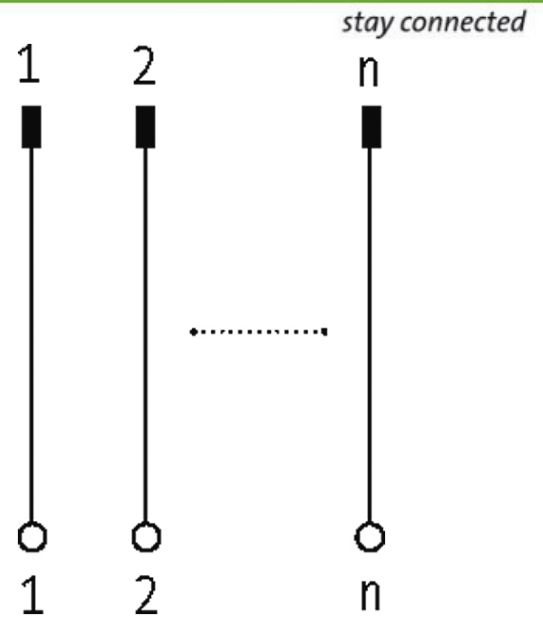

Product may differ from Image

Technical Data

| | |
|---------------------------|--|
| Operating voltage | 125 V AC/150 V DC |
| Operating current per bit | max. 1 A |
| Material group | EN 60664-1 over voltage, category II |
| Plug connector | for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook |

General data

| | |
|----------------------|-------------------------------|
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -20...+70 °C |
| Dimensions H x W x D | 63x75x48 mm |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85366990 |
| EAN | 4048879026123 |
| eClass | 27141120 |
| Packaging unit | 1 |