UFL 34 PLUG FOR SIGNAL TRANSFER

Product discontinued

Ribbon cable connector
34-pole

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

Link to Product

Illustration

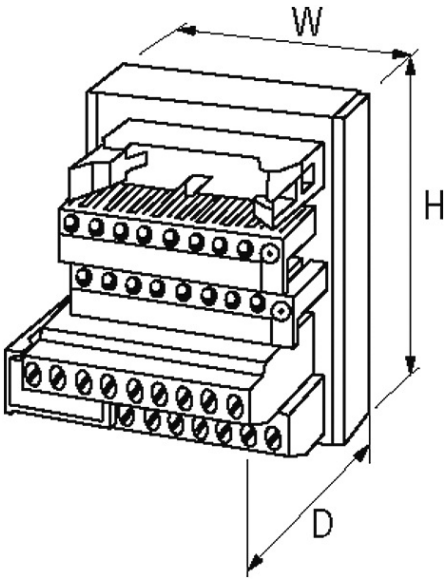

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

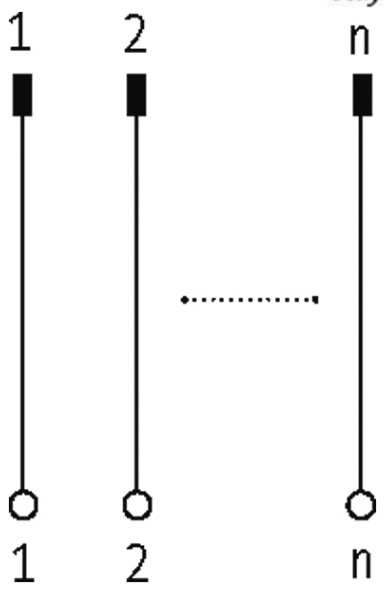

Product may differ from Image

Technical Data	
Operating voltage	125 V AC/150 V DC
Operating current per bit	max. 1 A
Material group	EN 60664-1 over voltage, category II
Plug connector	for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook
General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+70 °C
Dimensions H × W × D	63×95×48 mm
Commercial data	
country of origin	CZ
customs tariff number	85366990
EAN	4048879026109
eClass	27141120
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19