

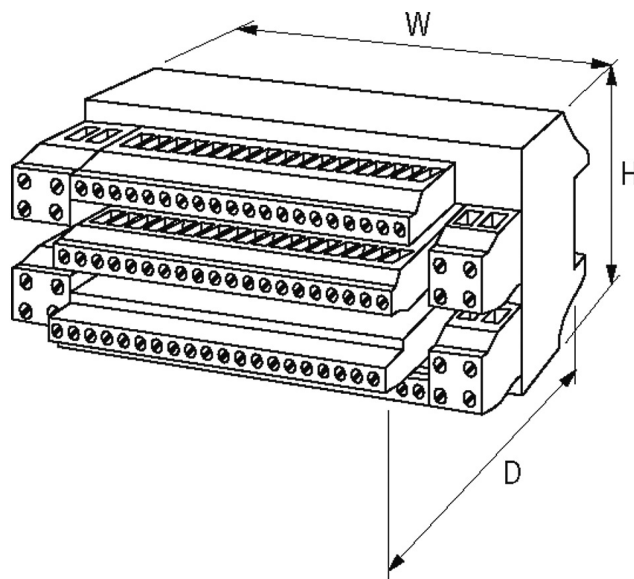
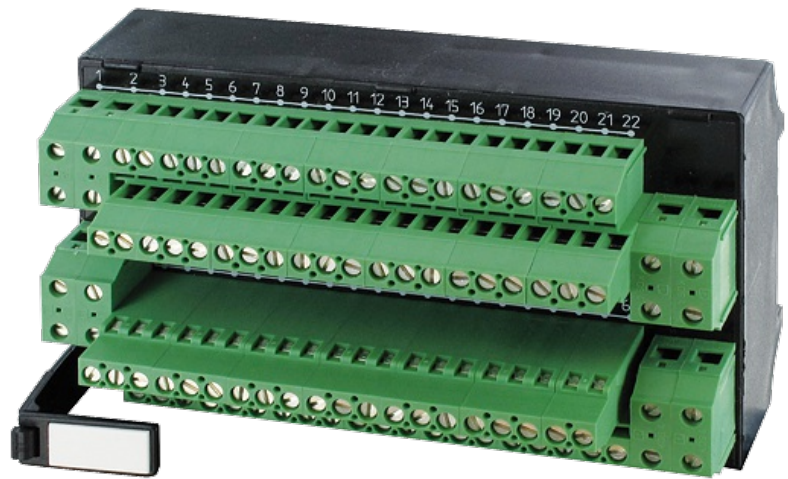
PKB 2 FOR SIGNAL TRANSFER

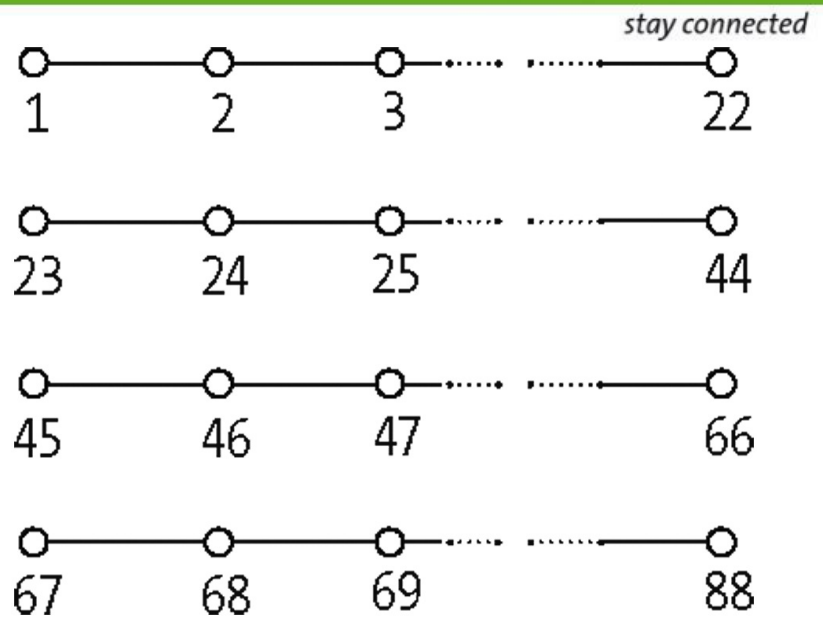
250V / 25 A

4×22-pole

25 A per potential rail

Screw plug-in terminals

Input terminal: max. 6 mm² single core, total current: max. 100 A[Link to Product](#)**Illustration**



Product may differ from Image

Technical Data

Operating voltage	250 V AC
Operating current per bit	25 A per potential rail
Total current	max. 100 A
Material group	EN 60664-1 over voltage, category II

General data

Connection	Screw plug-in terminal: max. 4 mm ² , input terminal: max. 6 mm ² single wire (AWG 9)
Mounting method	DIN-rail mountable (EN 60715)
Dimensions H x W x D	75x135x66 mm
Temperature range	-20...+60 °C

Commercial data

country of origin	CZ
customs tariff number	85369010
EAN	4048879026055
eClass	27143424
Packaging unit	1