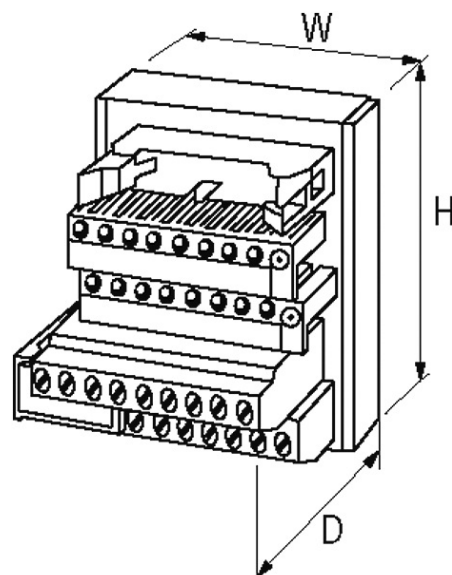



**TRANSFER PLUG , PASSIV**

UFL 40-pole

Ribbon cable connector  
40-pole  
Spring clamp terminals

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

[Link to Product](#)**Illustration**

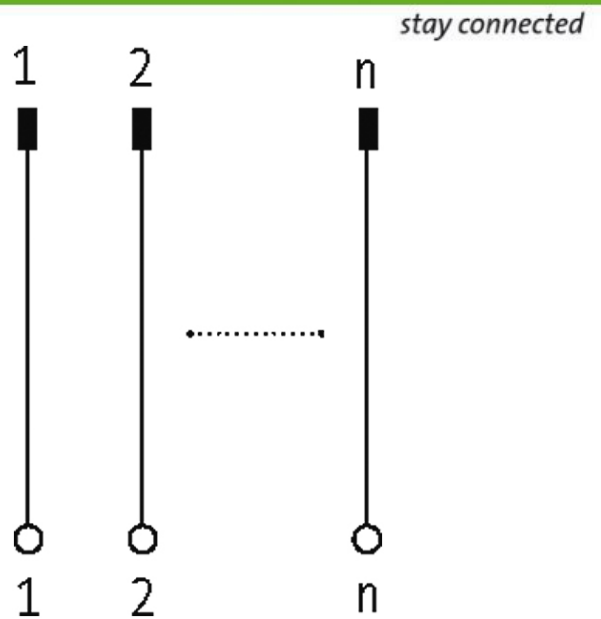

Product may differ from Image

#### Technical Data

Operating voltage	24 V DC
Operating current per bit	max. 1 A
Material group	EN 60664-1 over voltage, category III
Plug connector	for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook

#### General data

Pollution Degree	2
Connection	Spring clamp terminals
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+70 °C
Dimensions H x W x D	75x70x70 mm

#### Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879023887
eClass	27260710
Packaging unit	10