

## Product discontinued until 31.12.2018

MASI65 I/O MODUL, 4 digital inputs, 4 digital outputs


DI4/DO4 - 0.2/2 A

Y-wiring

8 × M12

## [Link to Product](#)

### Illustration

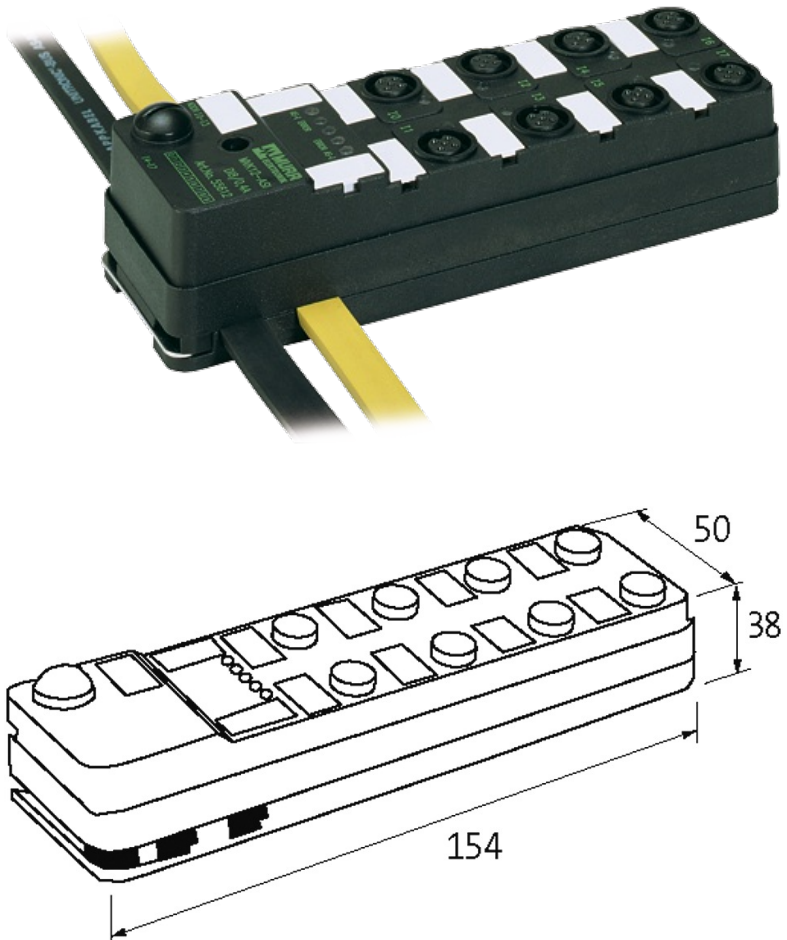

Product may differ from Image

### Approvals



### Input

Type	for 3-wire sensors or mechanical switches, PNP
Sensor supply IIS	max. 240 mA from AS-Interface (short-circuit and overload)

Sensor supply 05

protected)

### Technical Data

Bus voltage (AS-Interface)	26.5...31.6 V DC
Total current (AS-Interface)	max. 300 mA
Addressing	1...31 via address port
Profile (IO/ID/ID2 code)	S-7.F.E
Y-wiring	yes

### General data

Protection	IP67
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Dimensions H x W x D	38x50x154 mm

### Output

Supply voltage	24 V DC external (18...30.2 V DC) EN 61131-2, connection via black AS-Interface profile cable
Switching current per output	max. 2 A (short-circuit and overload protected)
Total current	max. 4 A

### Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes

### Commercial data

country of origin	CZ
customs tariff number	85176200
EAN	4048879050630
eClass	27242604
Packaging unit	1