




## MASI20 INSTALLATION TECHNOLOGY

Distributor AS-I and extern power, 3 potentials

5 ports, universal  
3 potentials  
without plug terminals

### [Link to Product](#)

#### Illustration

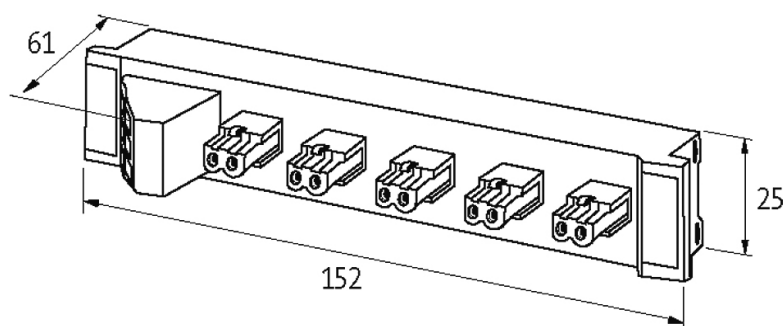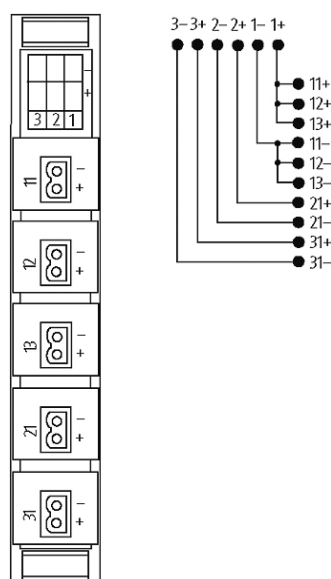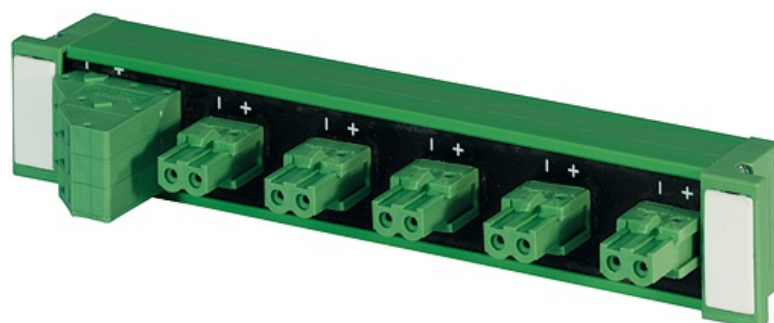

Product may differ from Image

## Approvals



## Technical Data

|                        |              |
|------------------------|--------------|
| Operating voltage      | max. 36 V DC |
| Current per connection | max. 8 A     |
| Total current          | max. 12 A    |

## General data

|                        |                                                                                                      |
|------------------------|------------------------------------------------------------------------------------------------------|
| Test isolation voltage | AS-Interface/Power 200 V, Power/Power 50 V (EN 60664-1)                                              |
| Protection             | IP20                                                                                                 |
| Connection             | Screw terminal: single wire (0.2...2.5 mm <sup>2</sup> ), stranded wire (0.2...1.5 mm <sup>2</sup> ) |
| Mounting method        | DIN-rail mountable (EN 60715)                                                                        |
| Dimensions H × W × D   | 43×25×142 mm                                                                                         |
| Temperature range      | -20...+70 °C                                                                                         |

## Commercial data

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85366990      |
| EAN                   | 4048879050487 |
| eClass                | 27279219      |
| Packaging unit        | 1             |