

Product discontinued until 31.12.2018

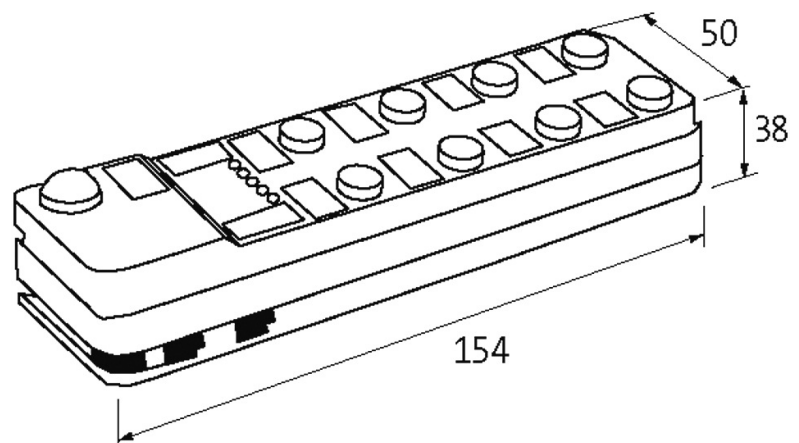
MASI65 I/O MODULE, 4 digital inputs, 3 digital outputs

DI4/DO3 - 0.15/2 A

AB-Slave

Y-wiring

7 × M12

[Link to Product](#)**Illustration**

Product may differ from Image

Approvals**Input**

Type

for 3-wire sensors or mechanical switches, PNP

Sensor supply US max. 150 mA from AS-Interface (short-circuit and overload protected)

Technical Data

| | |
|------------------------------|--------------------------------|
| Bus voltage (AS-Interface) | 26.5...31.6 V DC |
| Total current (AS-Interface) | max. 200 mA |
| Addressing | 1...31 A or B via address port |
| Profile (IO/ID/ID2 code) | S-7.A.2 |
| Y-wiring | yes |

General data

| | |
|----------------------|---|
| Protection | IP67 |
| Temperature range | 0...+55 °C (storage temperature -20...+70 °C) |
| Dimensions H x W x D | 38x50x154 mm |

Output

| | |
|------------------------------|---|
| Supply voltage | 24 V DC external (18...30.2 V DC) EN 61131-2, connection via black AS-Interface profile cable |
| Switching current per output | max. 2 A (short-circuit and overload protected) |
| Total current | max. 4 A |

Diagnostic

| | |
|-------------------------|------------|
| Communication status | via LED |
| Diagnostic via LED | per module |
| Monitoring - no voltage | yes |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85176200 |
| EAN | 4048879050210 |
| eClass | 27242604 |
| Packaging unit | 1 |