

## Product discontinued until 31.12.2018

MASI65 I/O MODULE, 4 digital inputs, 3 digital outputs

DI4/DO3 - 1.6/2 A

AB-Slave


Y-wiring

Sensor supply from external 24 V DC

7 × M12

## [Link to Product](#)

### Illustration

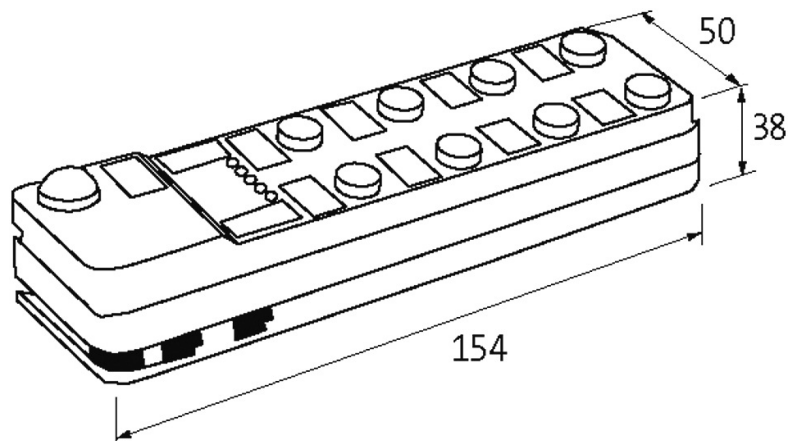

Product may differ from Image

### Approvals



### Input

Type	for 3-wire sensors or mechanical switches, PNP
Supply voltage	24 V DC external (18...30.2 V DC) EN 61131-2
Sensor supply US	max. 1.6 A external (short-circuit and overload protected)
<b>Technical Data</b>	
Bus voltage (AS-Interface)	26.5...31.6 V DC
Total current (AS-Interface)	max. 50 mA
Addressing	1...31 A or B via address port
Profile (IO/ID/ID2 code)	S-7.A.2
Y-wiring	yes
<b>General data</b>	
Protection	IP67
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Dimensions H x W x D	38x50x154 mm
<b>Output</b>	
Supply voltage	24 V DC external (18...30.2 V DC) EN 61131-2, connection via black AS-Interface profile cable
Switching current per output	max. 2 A (short-circuit and overload protected)
Total current	max. 4 A
<b>Diagnostic</b>	
Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes
<b>Commercial data</b>	
country of origin	CZ
customs tariff number	85176200
EAN	4048879050197
eClass	27242604
Packaging unit	1