


MPR67+ REPEATER PROFIBUS DP 3 SEGMENTS

Repeater PROFIBUS DP + PROFIsafe
3 segments
Protection IP67

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

[Link to Product](#)

Illustration

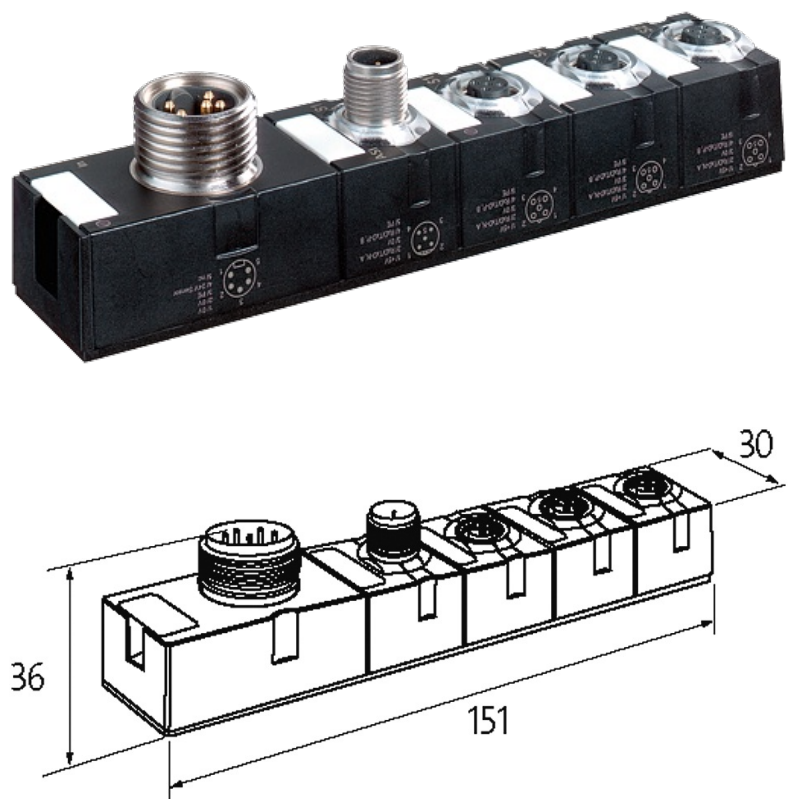

Product may differ from image

Technical Data

Operating voltage	24 V DC (EN 61131-2)
Module supply	via PIN 4 sensor supply (7/8" power)
Current consumption	approx. 80 mA
Transfer rate	max. 12 Mbit/s

General data

Protection	IP67
Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Dimensions H x W x D	151x30x34.5 mm

Diagnostic

Communication status	via LED and BUS
----------------------	-----------------

Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879285940
eClass	27242690
Packaging unit	1