


## Tree 8TX IP67 Metal - Unmanaged Switch - 8xM12

8 port unmanaged switch

Connection cables are in the online shop under "Connection Technology".


### [Link to Product](#)

#### Illustration

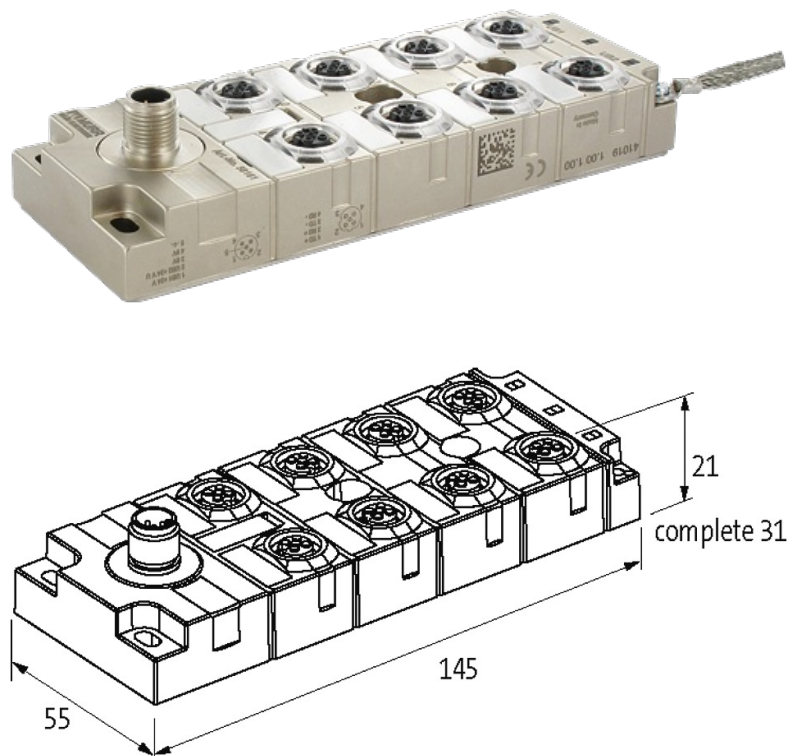

Product may differ from Image

#### Approvals



#### Connections

Fieldbus	8 × M12 (female), D-coded
Supply	1 × M12 (male), A-coded

#### Technical Data

Operating voltage	2 × 18...30 V DC, redundancy
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

#### Switch Management

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | [shop@murrelektronik.com](mailto:shop@murrelektronik.com) | [shop.murrelektronik.com](http://shop.murrelektronik.com)

Switch Form	Unmanaged Switch
Websserver	no
VLAN (QoS) IEEE 802.p	yes
Port Mirroring	no
Protocols	no
Remote maintenance	no
Alarm contact	no

### General data

Protection	IP67
Housing	Zinc die casting, matte nickel plated
Mounting method	4 hole screw mounting
Temperature range	-25...+60 °C (storage temperature -40...+80 °C)
Dimensions H x W x D	145x55x31 mm

### Diagnostic

Communication status	via LED
Monitoring - no voltage	yes

### Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879536509
eClass	19170106
Packaging unit	1