

K 4-24 PLUG-IN RELAY



IN: 24 VDC - OUT: 125 VAC/DC / 2 A


4 NO/NC contacts
24 V DC

Relays with other voltage available on request.

[Link to Product](#)

Illustration

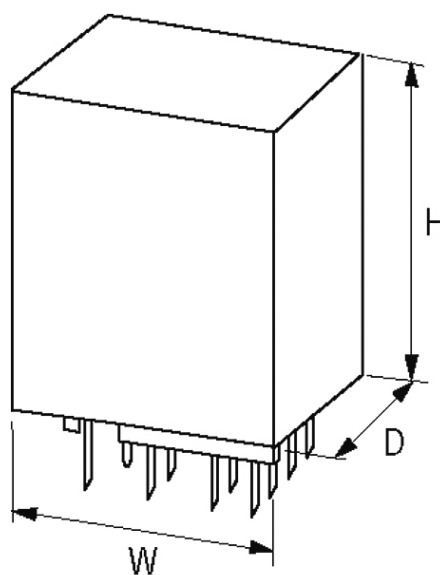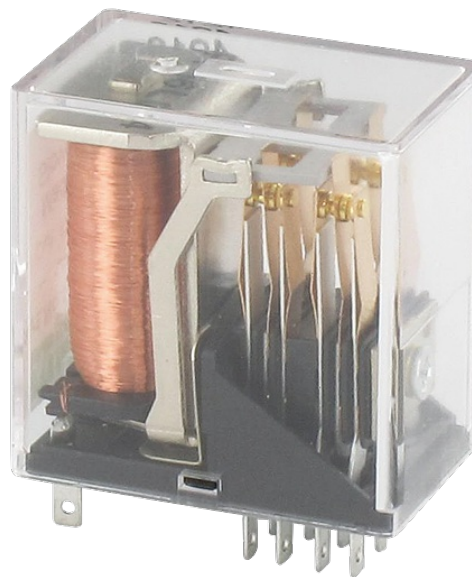

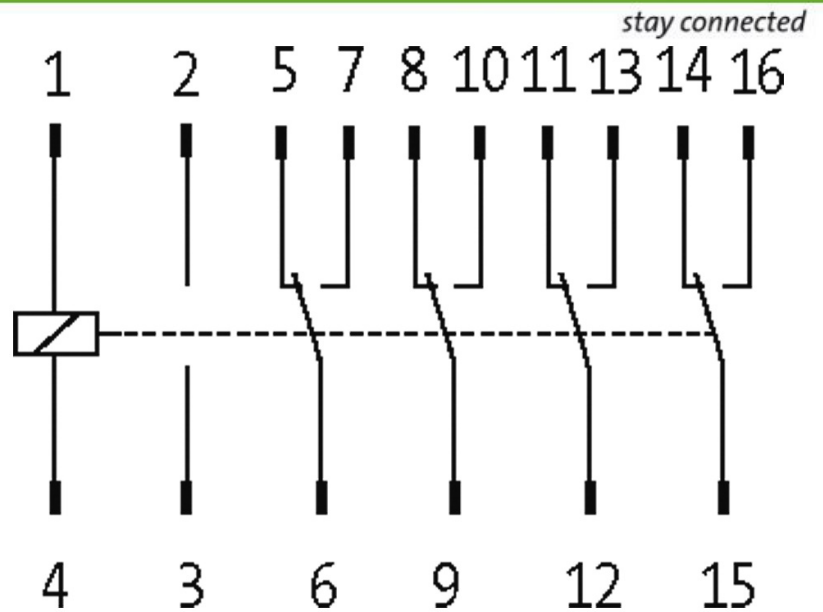

Product may differ from Image

Technical Data

Switching voltage	max. 125 V AC/250 V DC
Switching current	max. 2 A
Power rating (voltage dependent)	max. 50 VA/35 W
Max. power (W)	max. 2.2 VA/0.9 W
Switching time	7.5 ms

General data

Dimensions H x W x D	30x30x19 mm
Material (contact)	Ag Ni 0.15 hv; Ag hv

Commercial data

country of origin	SI
customs tariff number	85364900
EAN	4048879025713
eClass	27371001
Packaging unit	1