
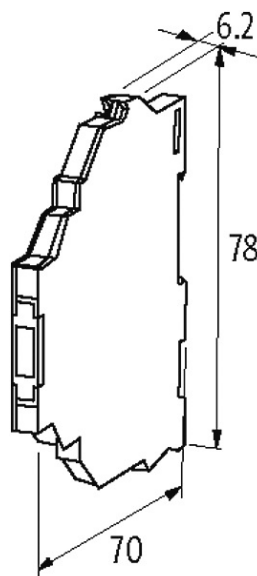


MIRO TR 48VDC FK OPTO-COUPLER MODULE

IN: 56 VDC - OUT: 48 VDC / 0,5 A


Transistor 0.5 A
48 V DC
Spring clamp terminals

[Link to Product](#)**Illustration**

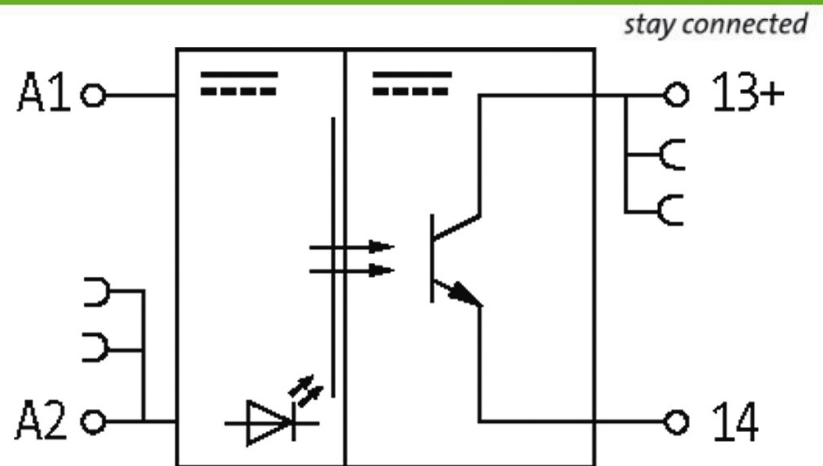

Product may differ from Image

Approvals

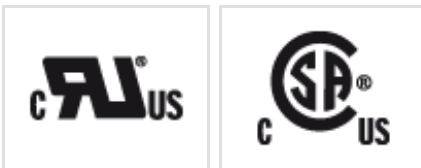

Input

Voltage range ON	18...56 V DC
Voltage range OFF	0...12 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H x W x D	78x6.2x70 mm

Output

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.5 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 10 µA
Switching time ON/OFF	20/100 µs
Switching frequency	max. 1 kHz/10 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879021845
eClass	27371601
Packaging unit	1