
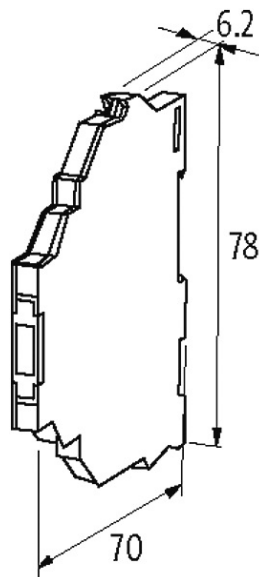
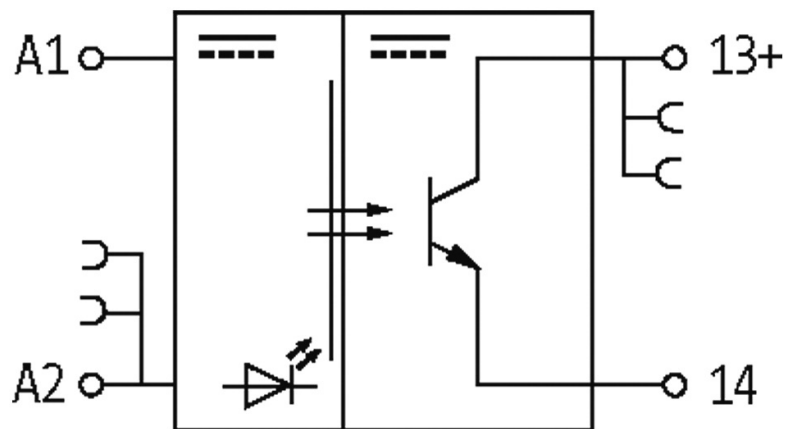


MIRO TR 90-250VAC FK OPTO-COUPLER MODULE

IN: 250 VAC/DC - OUT: 48 VDC / 0,5 A


Transistor 0.5 A
230 V AC
Spring clamp terminals

[Link to Product](#)**Illustration**

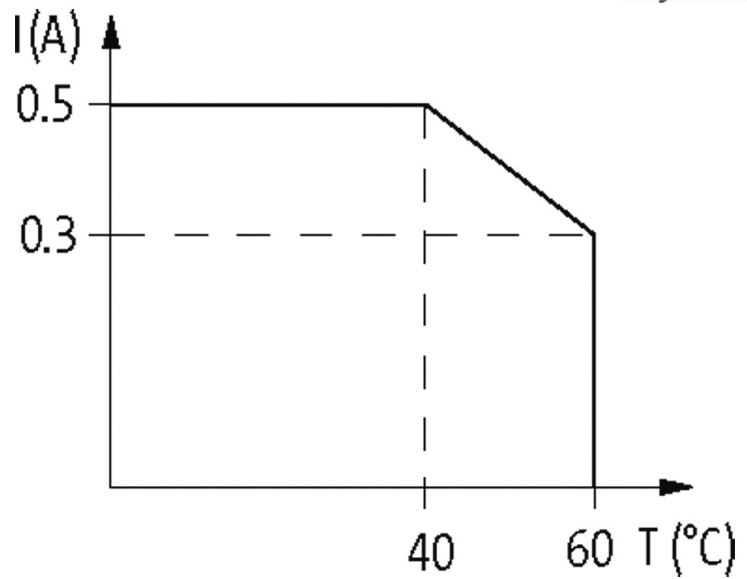

Product may differ from Image

Approvals

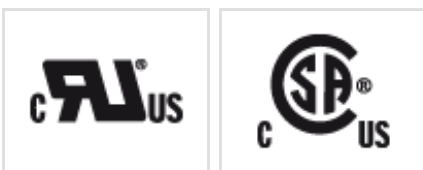

Input

Voltage range ON	90...250 V AC
Voltage range OFF	0...40 V AC
Control current	7 mA
LED display	LED (yellow)

General data

Dimensions H x W x D	78x6.2x70 mm
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Mounting method	DIN-rail mountable (EN 60715)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Output

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.5 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	55/15 ms
Switching frequency	max. 500/30 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879021821
eClass	27371601
Packaging unit	1