
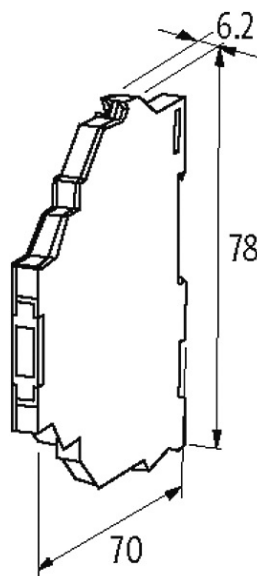


MIRO TR 90-250VAC FK OPTO-COUPLER MODULE

IN: 250 VAC - OUT: 48 VDC / 2 A


Transistor 2 A
230 V AC
Spring clamp terminals

[Link to Product](#)**Illustration**

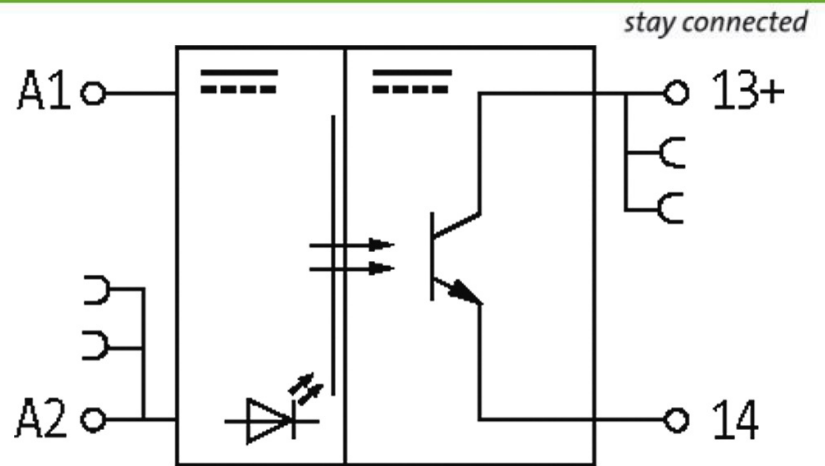

Product may differ from Image

Approvals

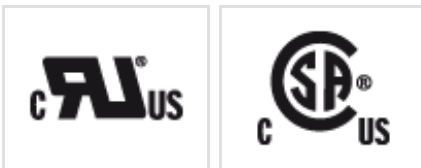

Input

Voltage range ON	90...250 V AC
Voltage range OFF	0...30 V AC
Control current	15 mA
LED display	LED (yellow)

General data

Dimensions H x W x D	78x6.2x70 mm
Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

Output

Switching voltage	5...48 V DC
Switching current per output	1 mA...2 A (without derating)
Saturation voltage (across output)	max. 0.3 V DC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	3/10 ms
Switching frequency	max. 10/1 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879021814
eClass	27371601
Packaging unit	1