


MIRO TR 24VDC FK OPTO-COUPLER MODULE



IN: 53 VDC - OUT: 48 VDC / 0,5 A - 1 C/O contact

Transistor 0.5 A
24 V DC
electr. NO/NC contact
Spring clamp terminals

[Link to Product](#)


Illustration

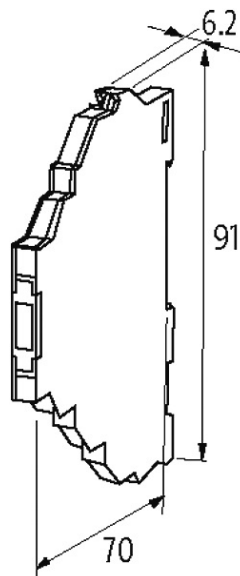

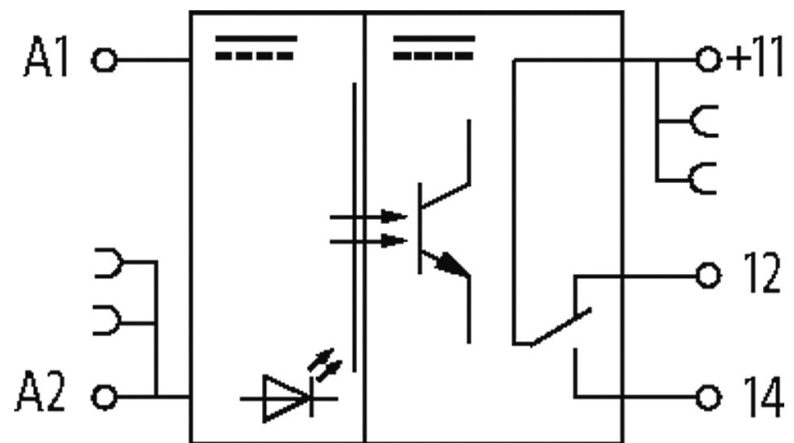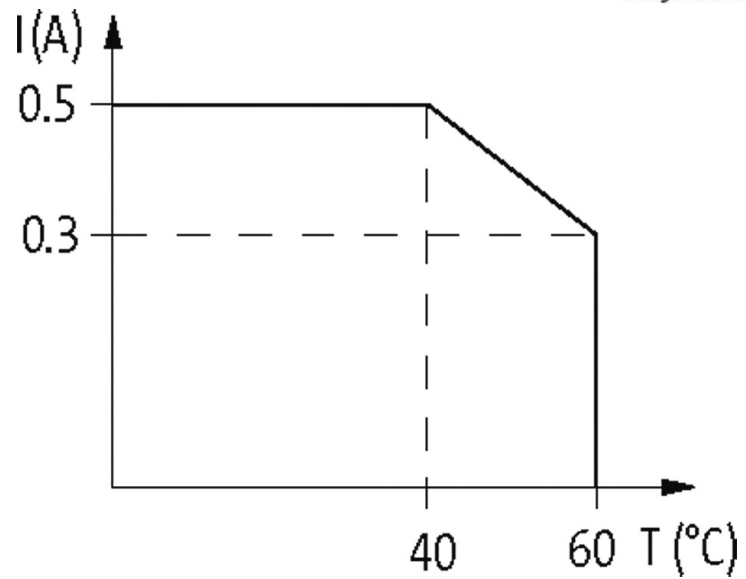

Product may differ from Image

Approvals

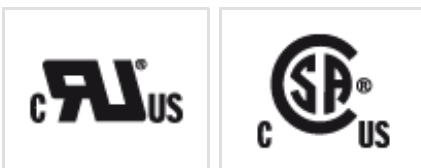

Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

Dimensions H x W x D 91x6.2x70 mm

Output

Switching voltage 5...48 V DC

Switching current per output 0.1 mA...0.5 A

Saturation voltage (across output) max. 1.2 V DC

Leakage current (output is open) max. 0.1 mA

Switching frequency max. 10 Hz

Switching time ON/OFF 40/150 µs

Commercial data

country of origin CZ

customs tariff number 85414090

EAN 4048879021807

eClass 27371601

Packaging unit 1