


## MIRO TR 24VDC FK 2A 5P OPTO-COUPLER MODULE


IN: 53 VDC - OUT: 48 VDC / 2 A

Transistor 2 A  
 24 V DC  
 Inrush current limiting  
 with solder terminal  
 Spring clamp terminals

### [Link to Product](#)

#### Illustration

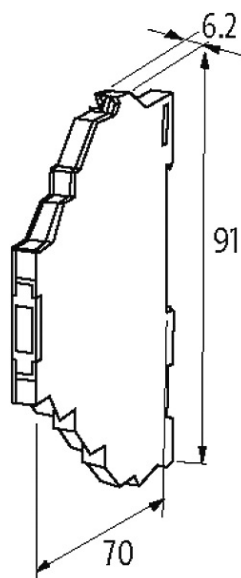


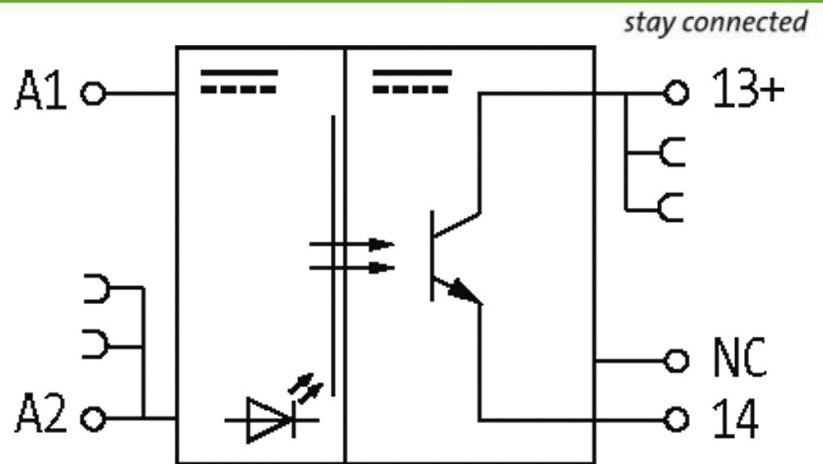

common return for NC

Product may differ from Image

### Approvals

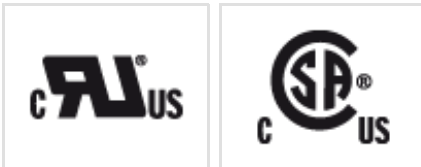

### Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	6 mA
LED display	LED (yellow)

### General data

Dimensions H x W x D	91x6.2x70 mm
Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

### Output

Switching voltage	5...48 V DC
Switching current per output	1 mA...2 A (overload protected)
Saturation voltage (across output)	max. 0.35 V DC
Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	5/10 ms
Switching frequency	max. 10 Hz

### Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879021784

---

eClass	27371601
Packaging unit	1