


MIRO TH 5VDC FK OPTO-COUPLER MODULE



IN: 5,5 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A

5 V DC

Spring clamp terminals

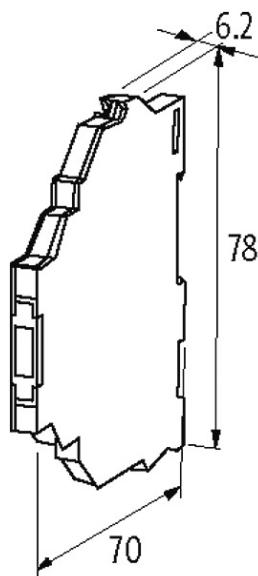[Link to Product](#)**Illustration**

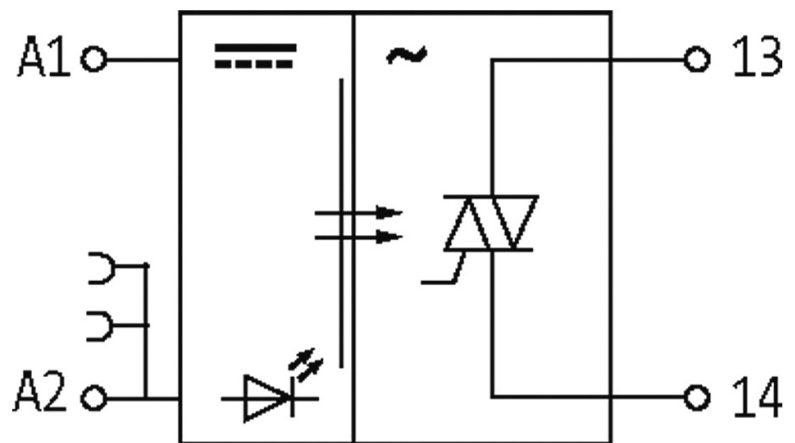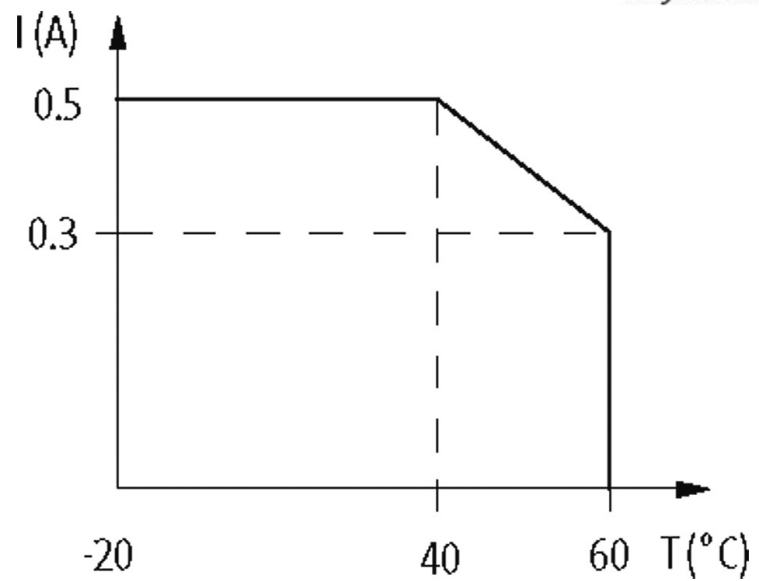

Product may differ from Image

Approvals



Input

Voltage range ON	4...5.5 V DC
Voltage range OFF	0...2 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

Dimensions H x W x D 78x6.2x70 mm

Output

Switching voltage	24...250 V AC
Switching current per output	2 mA...0.5 A
Saturation voltage (across output)	max. 1.5 V AC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20 Hz, depending on suppression

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879021715
eClass	27371601
Packaging unit	1