

ADAPTOR M12 MALE/ M12 FEMALE 4 POLES SHIELDED, I TO U

Adapter
 Male/female
 M12 – M12, 4-pole
 shielded
 Current /voltage converter



[Link to Product](#)

Illustration




Male

Female

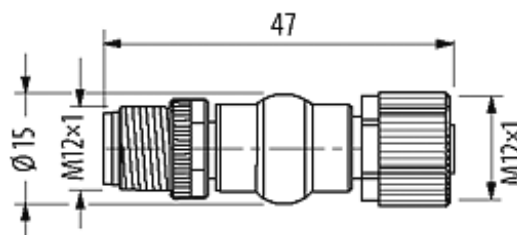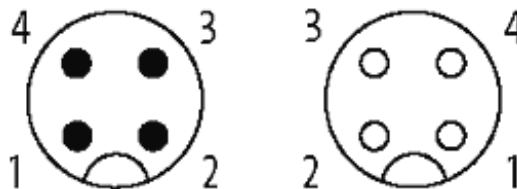

stay connected

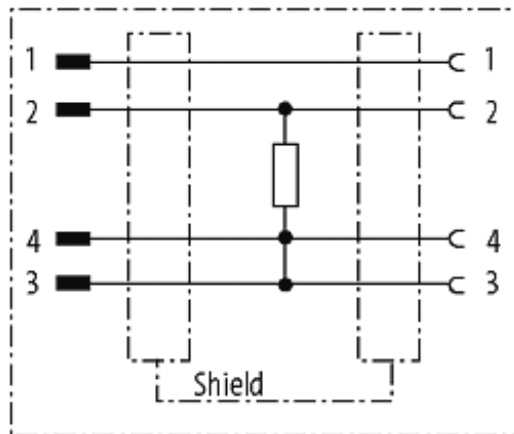

Product may differ from Image

Approvals



Form

Form 42251

Technical Data

Operating voltage	max. 30 V AC/DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Material	PUR
Application	Current/voltage converter

General data

Shielded	yes
Temperature range	-25...+85 °C
Test isolation voltage	0.8 kVrms

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879143189
eClass	27143423
Packaging unit	1