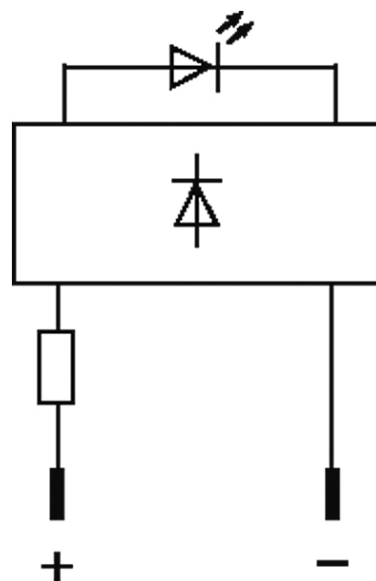


LED-INDICATOR OPAC / RED

LED-24V IP65

(red)
24 V AC/DC

The modules are suitable for wall thickness of 1.5...5.0 mm.

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

Operating voltage	24 V AC/DC \pm 15%
Current consumption	10 \pm 2 mA
Protection (IEC 60529/EN 60529)	IP65

General data

Housing	Plastic, flame retardant
LED \varnothing	5 mm
Front panel hole diameter \varnothing	9 mm
Connection	Faston 2.8 \times 0.8 mm
Temperature range	-20...+50 °C

Commercial data

country of origin	CZ
customs tariff number	85318070
EAN	4048879041331
eClass	27261590
Packaging unit	10