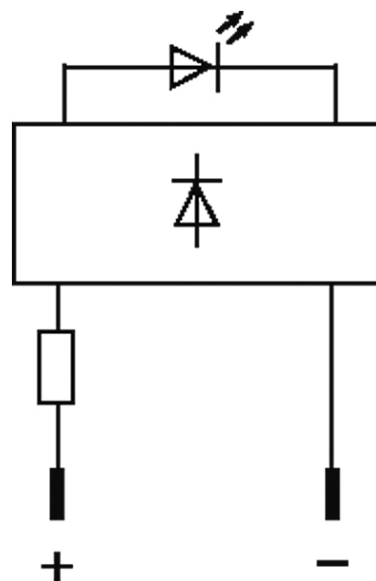


**LED-INDICATOR OPAC / YELLOW**

LED-24V IP65

(yellow)  
24 V AC/DC

The modules are suitable for wall thickness of 1.5...5.0 mm.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Operating voltage	24 V AC/DC $\pm$ 15%
Current consumption	10 $\pm$ 2 mA
Protection (IEC 60529/EN 60529)	IP65

**General data**

Housing	Plastic, flame retardant
LED $\varnothing$	5 mm
Front panel hole diameter $\varnothing$	9 mm
Connection	Faston 2.8 $\times$ 0.8 mm
Temperature range	-20...+50 °C

**Commercial data**

country of origin	CZ
customs tariff number	85318070
EAN	4048879041300
eClass	27261590
Packaging unit	10