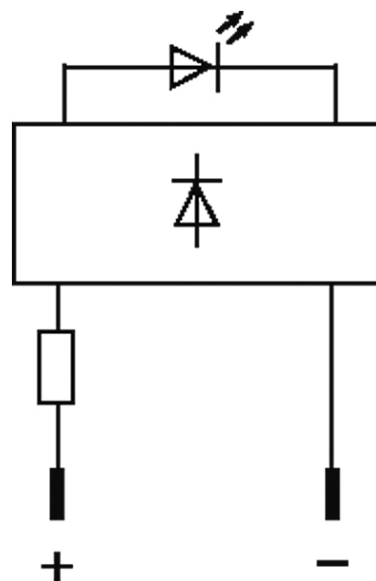


LED-INDICATOR OPAC / GREEN

LED-24V IP65

(green)
24 V AC/DC

The modules are suitable for wall thickness of 1.5...5.0 mm.

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Operating voltage	24 V AC/DC \pm 15%
Current consumption	10 \pm 2 mA
Protection (IEC 60529/EN 60529)	IP65

General data

Housing	Plastic, flame retardant
LED \varnothing	5 mm
Front panel hole diameter \varnothing	9 mm
Connection	Faston 2.8 \times 0.8 mm
Temperature range	-20...+50 °C

Commercial data

country of origin	CZ
customs tariff number	85318070
EAN	4048879041270
eClass	27261590
Packaging unit	10