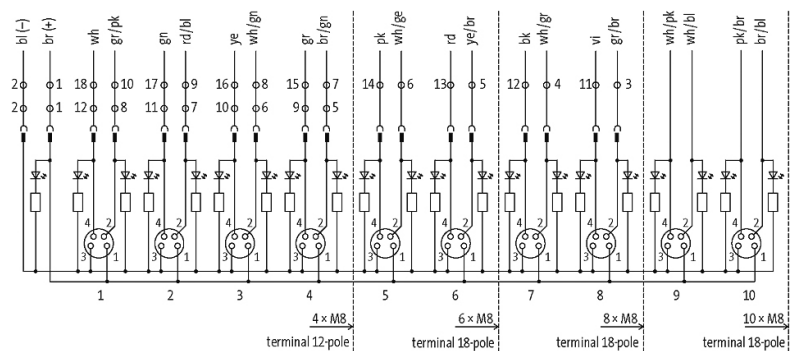
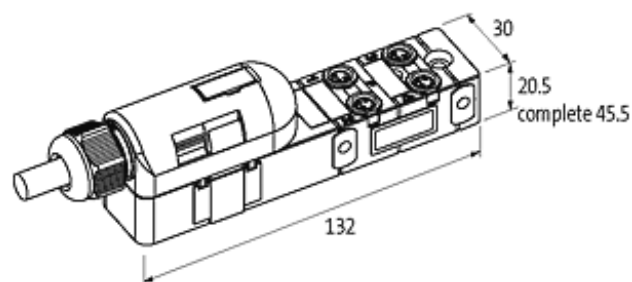


EXACT8, 4XM8, 4 POLE PLUG. CAP, SPRING-TERM.

3.0m PUR 8x0,34+2x0,75, UL/CSA

4-way, 4-pole
10.0 m

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Protection	IP67 inserted and tightened (EN 60529)
Operating voltage	24 V DC
Signal per port	2
Total current	max. 8 A
Housing	Plastic, flame retardant
Locking of ports	Screw thread M8 × 1 mm

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Commercial data

country of origin	CZ
customs tariff number	85444290
EAN	4048879056151
eClass	27279219
Packaging unit	1