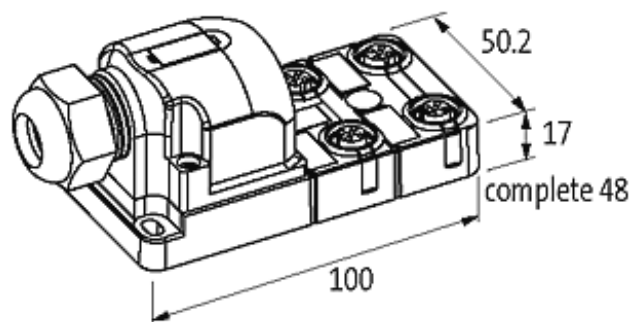


**EXACT12, 4XM12, 4 POLE CAP, PLUG. SCREW TERM.**




Self wireable, no LED

4-way, 4-pole  
without LED, up to 125 V AC/DC  
Screw plug-in terminals



Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

M12-Females 4-pole

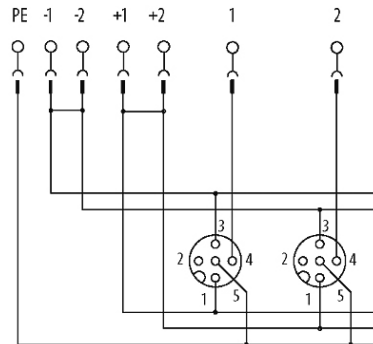

for 1 signal per port

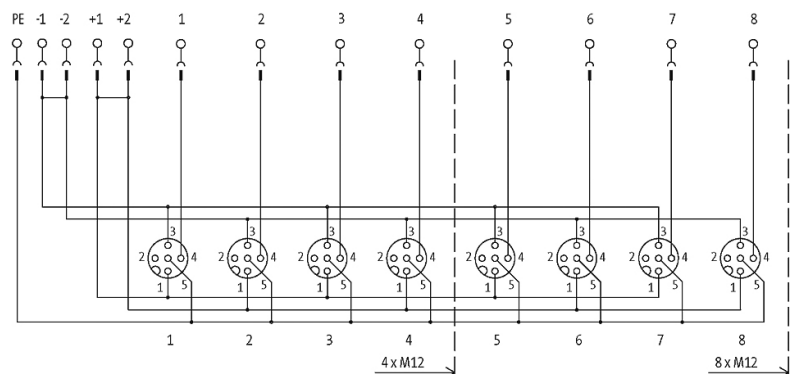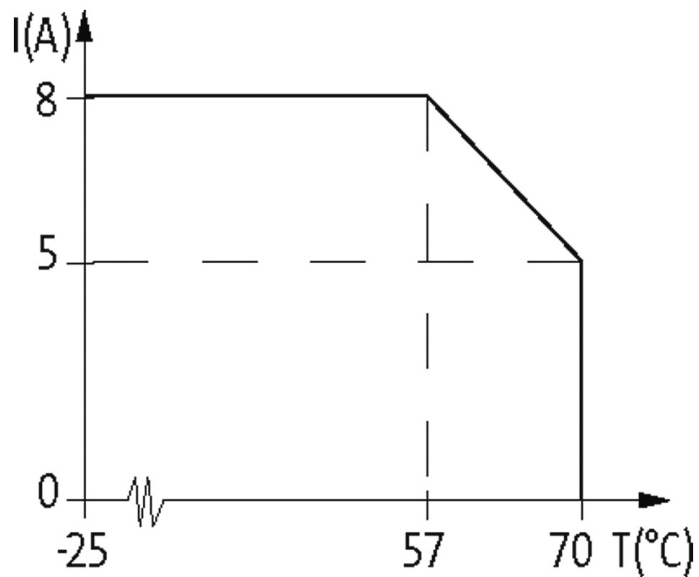

Product may differ from Image

### Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

PIN 5 (Earth)

**Technical Data**

Operating voltage	125 V AC/DC
Operating current per contact	max. 4 A
Total current	max. 8 A
Connection	Screw plug-in terminals: max. 1.5 mm <sup>2</sup> (AWG 16)
Protection	IP65/IP67
Housing	Plastic, flame retardant

**General data**

Temperature range -20...+70 °C

**Commercial data**

country of origin	DE
customs tariff number	85369010
EAN	4048879055932
eClass	27279219
Packaging unit	1