
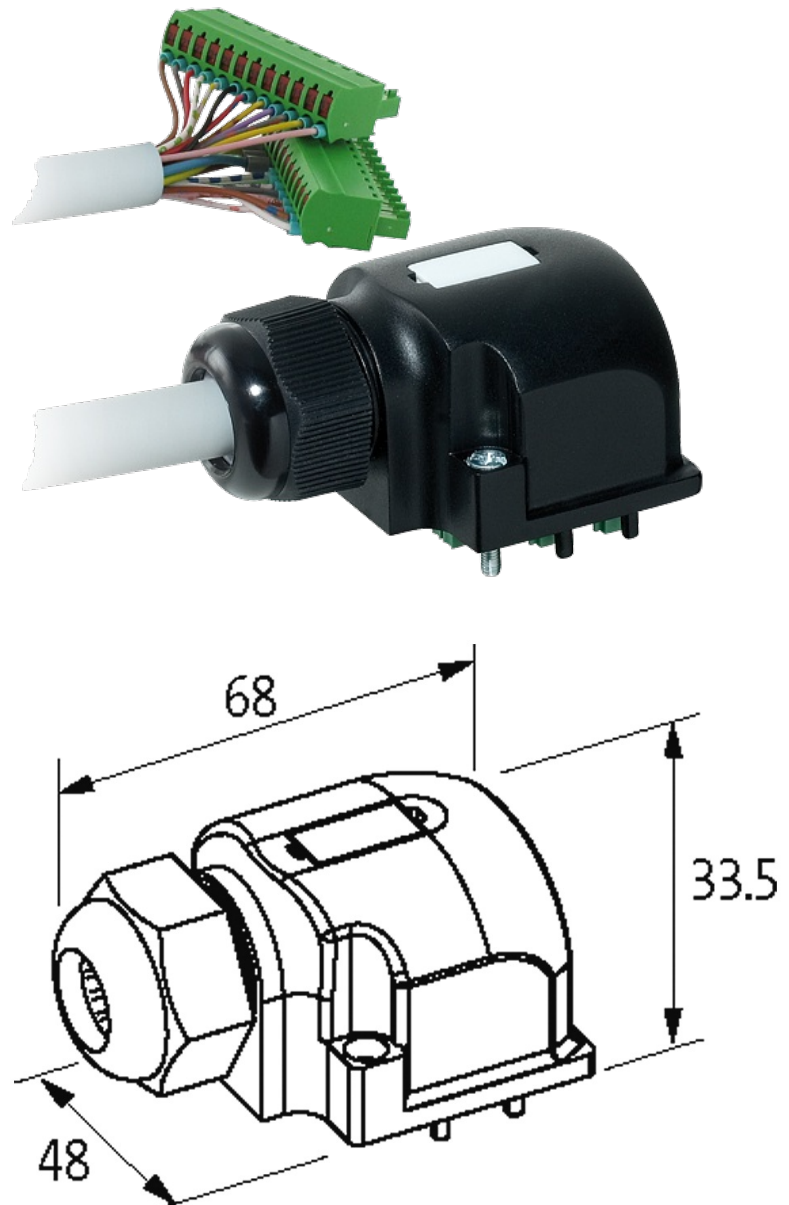


**EXACT12 SAFETY, PRE-WIRED CAP AND ATT. TERMINALS**10m PUR 20x0.34+3x0.75mm<sup>2</sup>

for 8-way distribution boxes, 5-, 4-pole  
Homerun cable with spring clamp terminals  
11/12-pole

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

**Link to Product****Illustration**

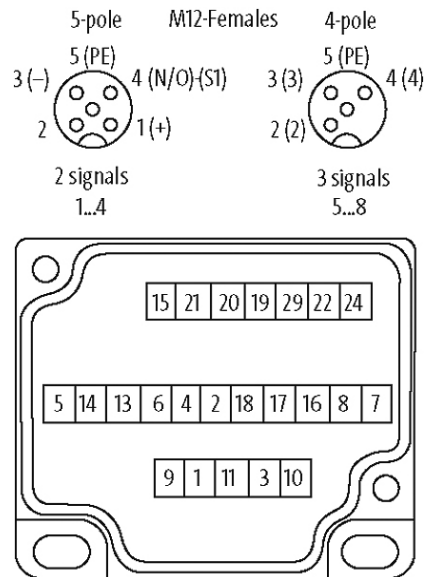

Product may differ from Image

### Approvals



### Cables

Cable number	408
No./diameter of wires	20×0.34 + 3×0.75 mm <sup>2</sup>
C-track properties	5 Mio.
Jacket Color	gray
Material (jacket)	PUR (UL/CSA)
Outer Ø	10.4 mm ±5%
Bend radius (fixed)	7.5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+80 °C
Approval (cable)	UL (AWM-Style 20233), CSA

### Technical Data

Housing	Plastic, flame retardant
Total current	max. 8 A

### General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

### Commercial data

country of origin	CZ
customs tariff number	85444290

EAN	4048879315654
eClass	27143423
Packaging unit	1