


## MCS POWER SUPPLY 1-PHASE,


IN: 95-132VAC OUT: 24-28V/5ADC

INPUT: 95...132 V AC  
OUTPUT: 24...28 V DC  
Current: 5 A

### [Link to Product](#)

#### Illustration

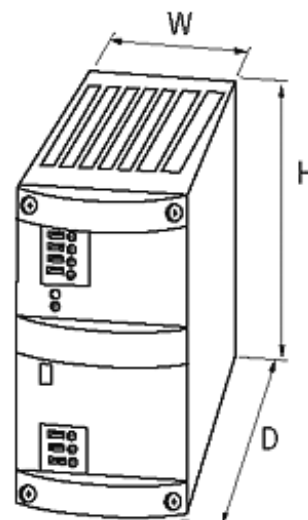

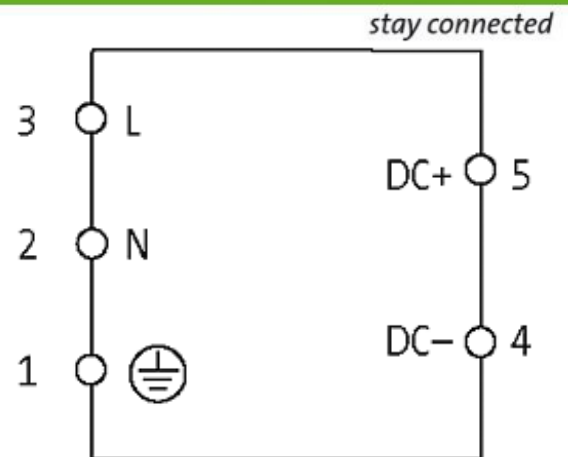

Product may differ from Image

### Approvals



### Input

Input voltage	95...132 V AC
Input current	2.2 A (115 V AC)
Inrush current after 1 ms	max. 15 A
Primary fusing external	max. 10 A
Frequency	50...60 Hz

### General data

Standards	EN 60950-1, EN 61204-3, EN 55022 B
Mounting method	DIN-rail mountable TH35 (EN 60715)
Efficiency	84%
Relative humidity	5...95%, no condensation
Dimensions H x W x D	115x54x125 mm
Temperature range	0...+60 °C (storage temperature -25...+85 °C)

### Output

Output voltage	24 V DC (SELV), $\pm 1\%$ ; 24...28 V adjustable
Output current	5 A (+60 °C); 6 A (+40 °C)
Mains failure bridging time	min. 20 ms (115 V AC)
Ripple	max. 20 mVrms
Spikes	max. 80 mV p-p
Unit protection	Short-circuit and overload protected
LED display	LED (green) for output voltage
Selectable switch-off mode	front sided plug link (automatic re-start or definite shut-off)
Parallel usage/serial usage	yes/yes

### Commercial data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

country of origin	CZ
customs tariff number	85044090
EAN	4048879080538
eClass	27049002
Packaging unit	1