


MEN POWER SUPPLY 1/2-PHASE, SMOOTHED


IN: 115/230+/-10VAC OUT: :24V/15ADC

Current: 15 A

Output rating: 360 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current. For any mounting position at vertical wall.

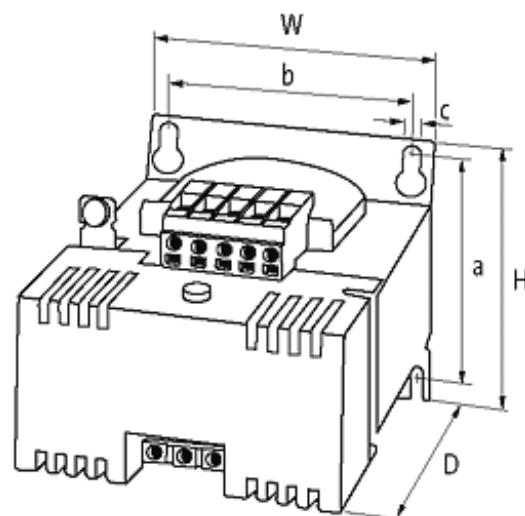[Link to Product](#)**Illustration**

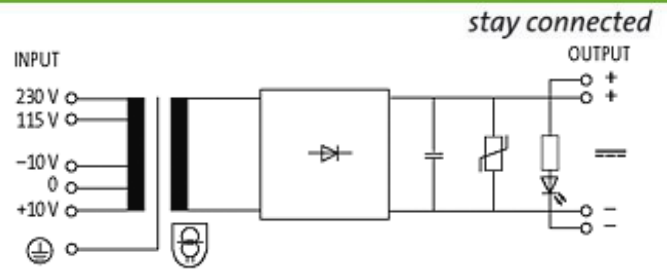

Product may differ from Image

Approvals



Input

Input voltage	115/230 V AC \pm 10 V AC
Input current	5.6 A (115 V AC); 2.8 A (230 V AC)
Input fuse (external)	8 AT (115 V AC); 4 AT (230 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Dimensions H x W x D	138.5x135x181.5 mm
Fixing centers a x b x c	126x104x6.5 mm
Temperature range	-20...+60 °C, no condensation

Output

Output voltage	24 V DC (SELV)
Output current (T a 60/40 °C)	max. 15 A (115 V AC); 18 A (230 V AC)
Ripple	max. 5%rms
Output filter	LED, VDR and smoothing capacitor

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879080026
eClass	27049002
Packaging unit	1