


**MEN POWER SUPPLY 1/2-PHASE, SMOOTHED**


IN: 115/230+/-10VAC OUT: :24V/20ADC

Current: 20 A

Output rating: 480 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current. For any mounting position at vertical wall.

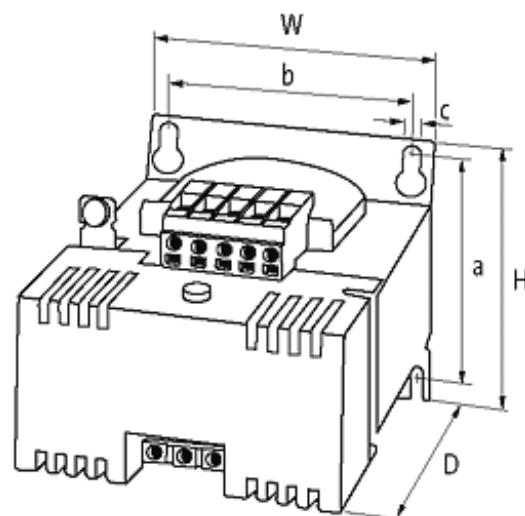[Link to Product](#)**Illustration**

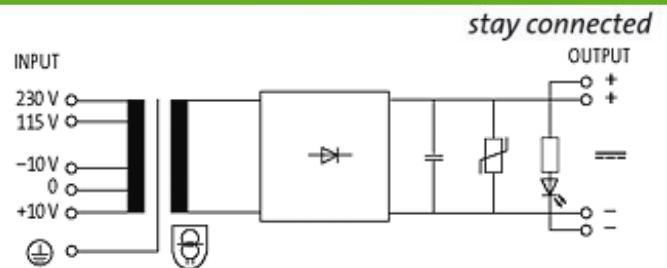

Product may differ from Image

### Approvals



### Input

Input voltage	115/230 V AC $\pm$ 10 V AC
Input current	7.4 A (115 V AC); 3.7 A (230 V AC)
Input fuse (external)	10 A (T) (115 V AC); 5 A (T) (230 V AC)
Frequency	50...60 Hz

### General data

Standards	EN 55011 A
Mounting method	Key-hole mounting
Dimensions H x W x D	127x174x213.5 mm
Fixing centers a x b x c	102x135x7 mm
Temperature range	-20...+60 °C, no condensation

### Output

Output voltage	24 V DC (SELV)
Output current (T a 60/40 °C)	max. 20 A (115 V AC); 24 A (230 V AC)
Ripple	max. 5%rms
Output filter	LED, VDR and smoothing capacitor

### Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879080019
eClass	27049002
Packaging unit	1