

MDT three-phase control and isolation transformer



P:21000VA IN:3x400VAC±5% OUT :3x400VAC

3-phase isolation transformer
21 000 VA
Isolation class T 40/H

Other voltages on request.

[Link to Product](#)

Illustration

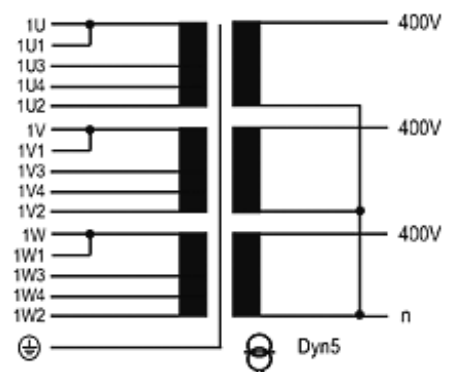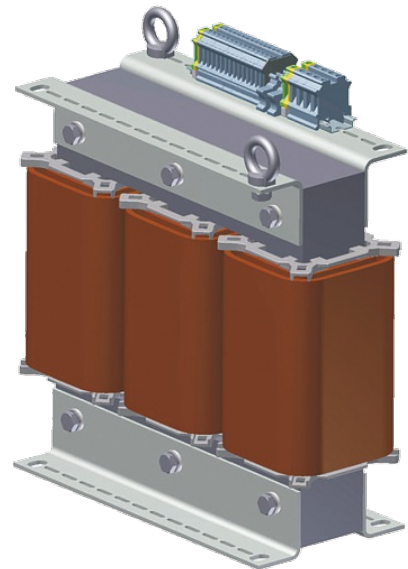

Pri. Anschluß / Pri. connection

Eingang / input	Klemme / terminal	Verbindung / connection
-5%	1U; 1V; 1W	1U1+1W3; 1V1+1U3; 1W1+1V3
400V	1U; 1V; 1W	1U1+1W4; 1V1+1U4; 1W1+1V4
+5%	1U; 1V; 1W	1U1+1W2; 1V1+1U2; 1W1+1V2

Product may differ from Image

Input

Input voltage	3 × 400 V AC ±5%
Input current	31.7 A (3 × 400 V AC)
Inrush current	approx. 21×I _n
Short-circuit current	749 A
Frequency	50...60 Hz

General data

Test isolation voltage	4.5 kV (prim./sec.)
Mounting method	screw fixing
Dimensions H × W × D	460×420×260 mm
Fixing centers a × b × c	316×173 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	3 × 400 V AC
Output rating	21 000 VA

Commercial data

country of origin	DE
customs tariff number	85043300
EAN	4048879593366
eClass	27031201
Packaging unit	1