



## MET SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER


P:500VA IN:400VAC±5% OUT:110VAC

Single-phase - Control and Isolation Transformers  
500 VA  
Isolation class T 40/B

### [Link to Product](#)

#### Illustration

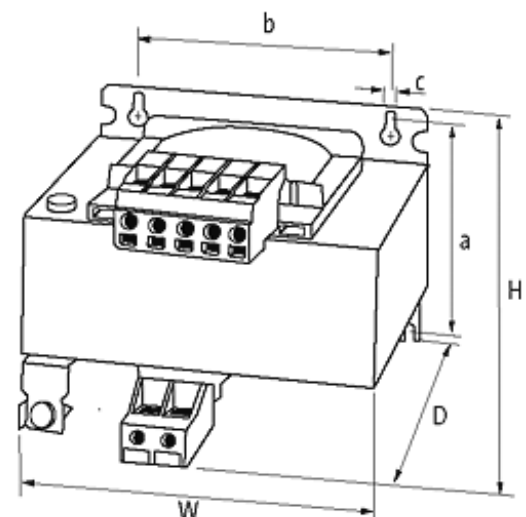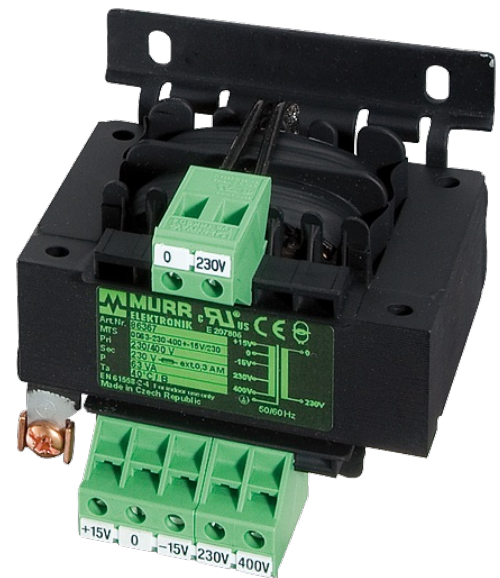

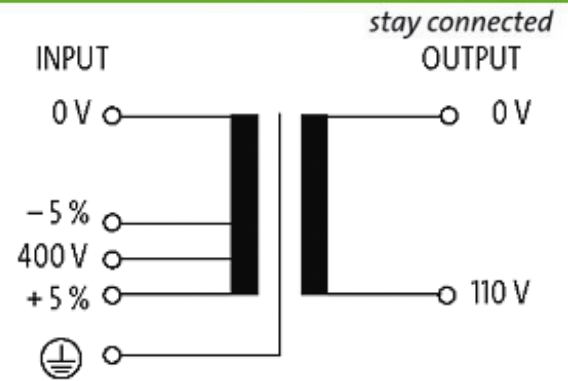

Product may differ from Image

### Approvals



### Input

|                       |                    |
|-----------------------|--------------------|
| Input voltage         | 400 V AC $\pm 5\%$ |
| Input current         | 2.67 A (400 V AC)  |
| Inrush current        | 23 A (400 V AC)    |
| Short-circuit current | 31 A (400 V AC)    |
| Frequency             | 50...60 Hz         |

### General data

|                          |   |
|--------------------------|---|
| Standards                | EN 61558-1, EN 61558-2-4, EN 62041 category 0   |
| Test isolation voltage   | 5.8 kV (prim./sec.)                             |
| Fixing centers a x b x c | 88x122x7 mm                                     |
| Dimensions H x W x D     | 110x150x144 mm                                  |
| Drill hole $\emptyset$   | 7x11 mm   |
| Mounting method          | screw fixing                                    |
| Temperature range        | -20...+40 °C (storage temperature -20...+80 °C) |

### Output

|                |          |
|----------------|----------|
| Output voltage | 110 V AC |
| Output rating  | 500 VA   |

### Commercial data

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85043180      |
| EAN                   | 4048879073882 |
| eClass                | 27031202      |
| Packaging unit        | 1             |