
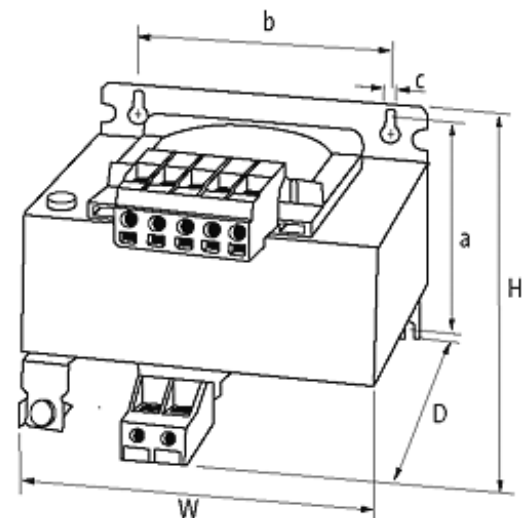
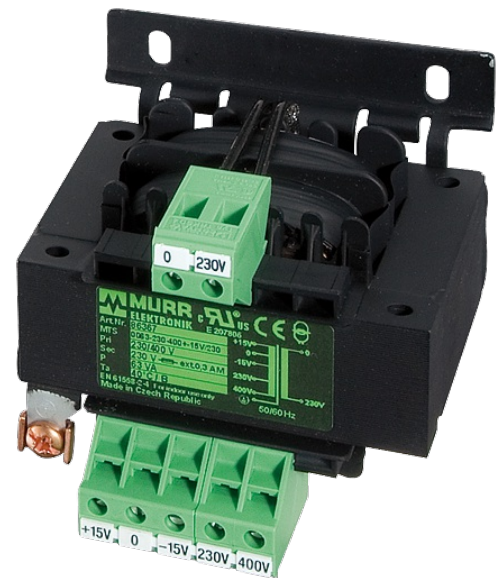


MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:125VA IN:230VAC±5% OUT:60VAC

Single-phase - Control and Isolation Transformers
125 VA
Isolation class T 40/B

[Link to Product](#)**Illustration**

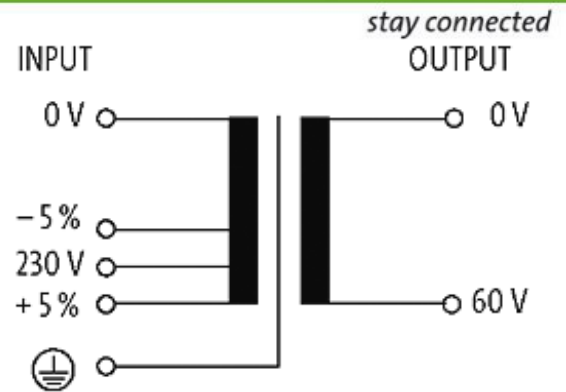

Product may differ from Image

Approvals



Input

Input voltage	230 V AC $\pm 5\%$
Input current	0.65 A (230 V AC)
Inrush current	7.1 A (230 V AC)
Short-circuit current	9.6 A (230 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Test isolation voltage	3.8 kV
Fixing centers a x b x c	65.3x64x4.8 mm
Dimensions H x W x D	88x84x95 mm
Drill hole \varnothing	4.8x12 mm
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	60 V AC
Output rating	125 VA

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879073790
eClass	27031202
Packaging unit	1