

MTS SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER



P:250VA IN:500VAC OUT :230VAC


Single-phase - Control and Isolation Transformers
250 VA
Isolation class T 40/B

Other voltages on request.

[Link to Product](#)

Illustration

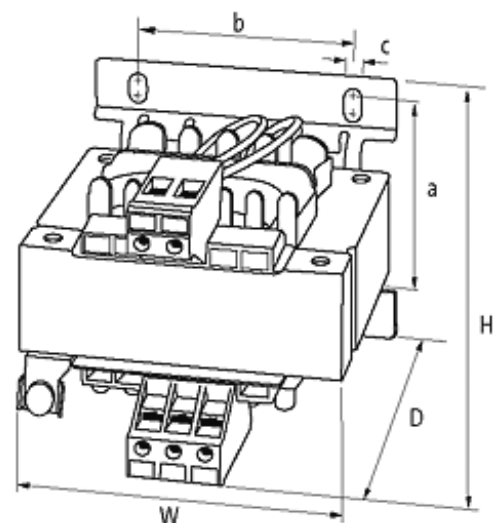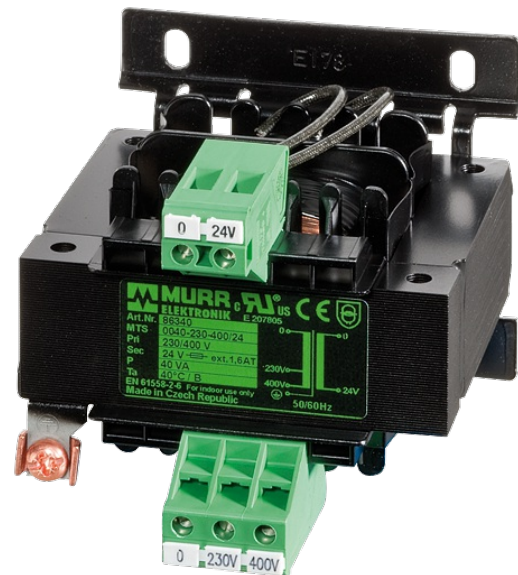

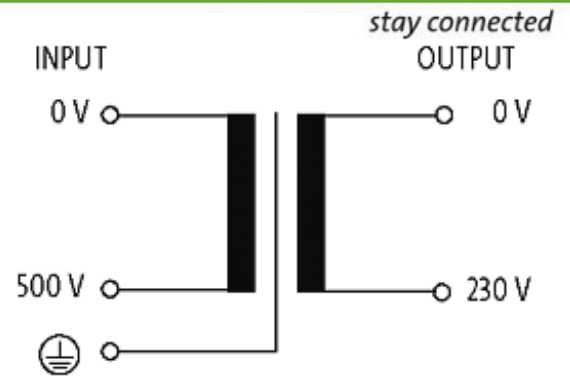

Product may differ from Image

Input

Input voltage	500 V AC
Input current	0.6 A (500 V AC)
Inrush current	8.4 A (500 V AC)
Short-circuit current	11.2 A (500 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-4, EN 62041 category 0
Test isolation voltage	6.3 kV (prim./sec.)
Mounting method	Screw and DIN-rail mounting
Dimensions H x W x D	104x97x108 mm
Fixing centers a x b x c	86.5x84x4.8 mm
Drill hole Ø	4.8x8.4 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	230 V AC
Output rating	250 VA

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879073752
eClass	27031202
Packaging unit	1