
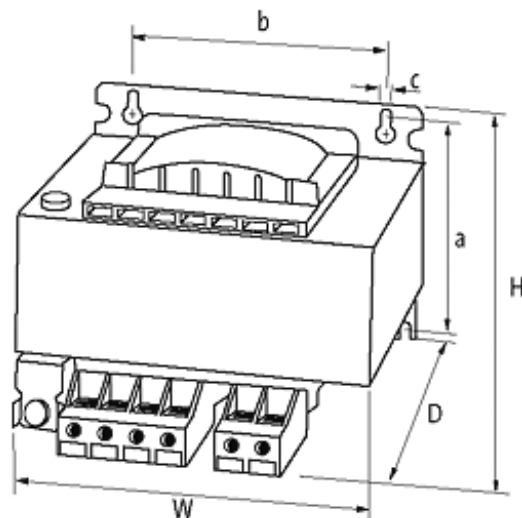
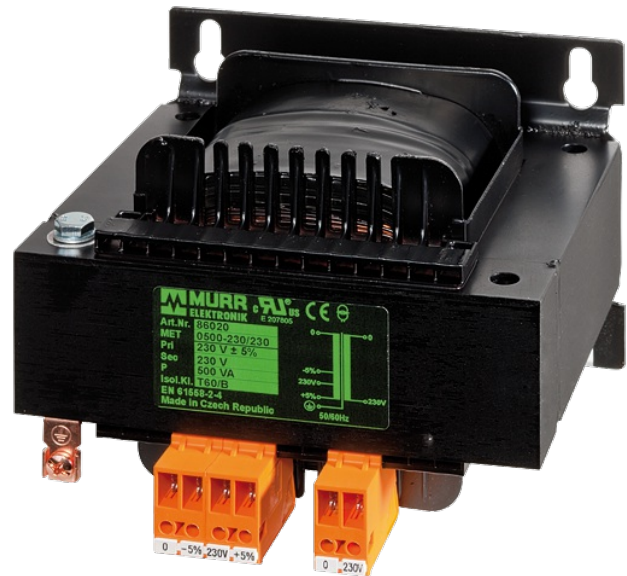


MTS SINGLE-PHASE SAFETY TRANSFORMER

P:75VA IN:115/230VAC OUT :5VAC

Single-phase - Control and Isolation Transformers
75 VA
Isolation class T 40/B

[Link to Product](#)**Illustration**

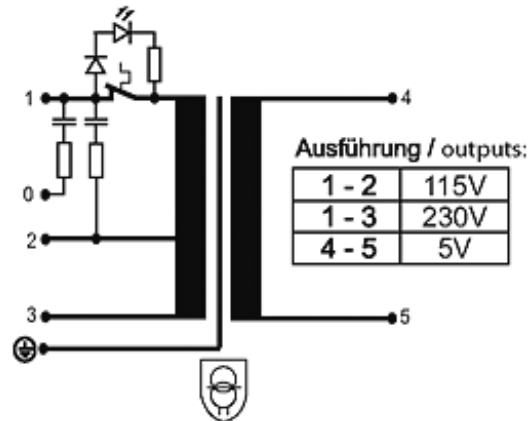

Product may differ from Image

Approvals



Input

Input voltage	115/230 V AC
Input current	0.82 A (115 V AC); 0.41 A (230 V AC)
Inrush current	6.2 A (115 V AC); 3.1 A (230 V AC)
Short-circuit current	7.5 A (115 V AC); 3.8 A (230 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-6, EN 62041 category 0
Test isolation voltage	3.8 kV
Fixing centers a × b × c	53×64×4.8 mm
Dimensions H × W × D	74×84×95 mm
Mounting method	Screw fixing M5, 4 pcs. in rectangle 53 × 64 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	5 V AC
Output rating	75 VA

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879288811
eClass	27031202
Packaging unit	1