
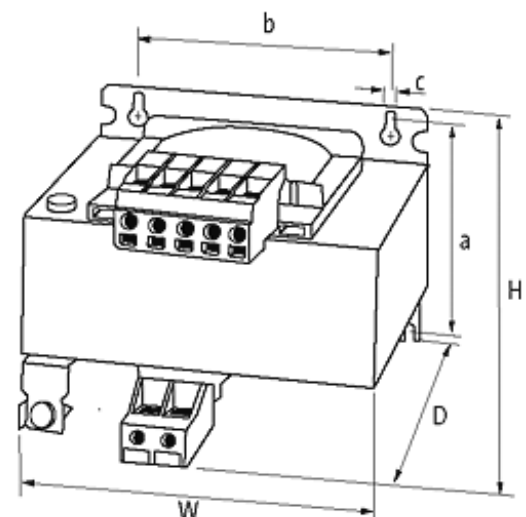


**MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER**

P:2400VA IN:400VAC±5% OUT :230VAC

Single-phase - Control and Isolation Transformers  
2400 VA  
Isolation class T 40/B

[Link to Product](#)**Illustration**

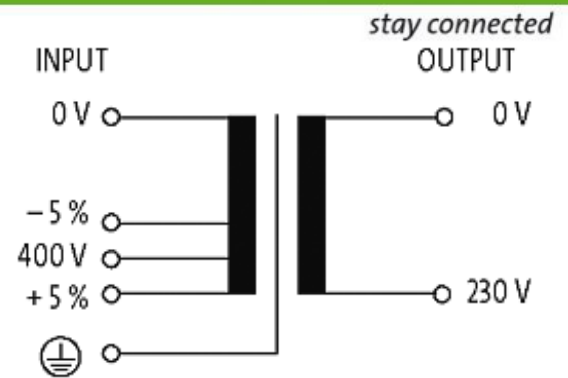

Product may differ from Image

### Approvals



### Input

|                       |                    |
|-----------------------|--------------------|
| Input voltage         | 400 V AC $\pm 5\%$ |
| Frequency             | 50...60 Hz         |
| Input current         | 6.3 A (400 V AC)   |
| Inrush current        | 63 A (400 V AC)    |
| Short-circuit current | 294 A (400 V AC)   |

### General data

|                          |   |
|--------------------------|---|
| Standards                | EN 61558-1, EN 61558-2-4, EN 62041 category 0   |
| Test isolation voltage   | 4 kV (prim./sec.)                               |
| Dimensions H x W x D     | 185x192x185 mm                                  |
| Fixing centers a x b x c | 155x150x10 mm                                   |
| Drill hole $\varnothing$ | 10x14 mm  |
| Mounting method          | Long-hole mounting                              |
| Temperature range        | -20...+40 °C (storage temperature -40...+80 °C) |

### Output

|                |          |
|----------------|----------|
| Output voltage | 230 V AC |
| Output rating  | 2400 VA  |

### Commercial data

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85043200      |
| EAN                   | 4048879330619 |
| eClass                | 27031202      |
| Packaging unit        | 1             |