

MST SINGLE-PHASE SAFETY TRANSFORMER


P:160VA IN:230VAC OUT :20VAC


Single-phase - Control and Isolation Transformers
160 VA
Isolation class T 40/B

Other voltages on request.

[Link to Product](#)

Illustration

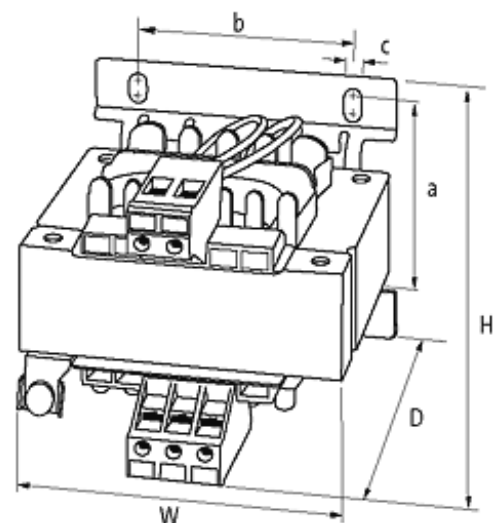

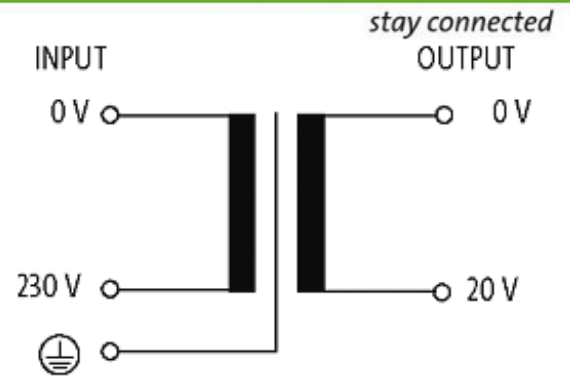

Product may differ from Image

Input

Input voltage	230 V AC
Input current	0.81 A (230 V AC)
Inrush current	6.6 A (230 V AC)
Short-circuit current	11.5 A (230 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-6, EN 62041 category 0
Test isolation voltage	3.8 kV
Mounting method	Key-hole mounting
Dimensions H x W x D	91x97x105 mm
Fixing centers a x b x c	75.3x84x5.8 mm
Drill hole Ø	5.8x12 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	20 V AC
Output rating	160 VA

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879318075
eClass	27031202
Packaging unit	1