

MTS SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER



P:150VA IN:440/460/480/500VAC OUT :24VAC/230VAC


Single-phase - Control and Isolation Transformers
 3 000 VA
 Isolation class T 40/B
 150 VA (440; 460; 480; 500 V AC)

Other voltages on request.

[Link to Product](#)

Illustration

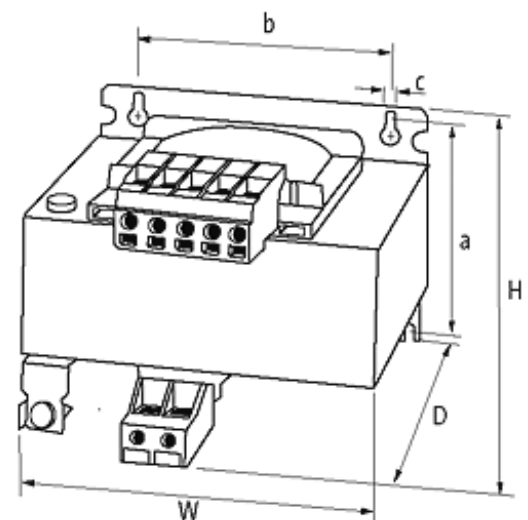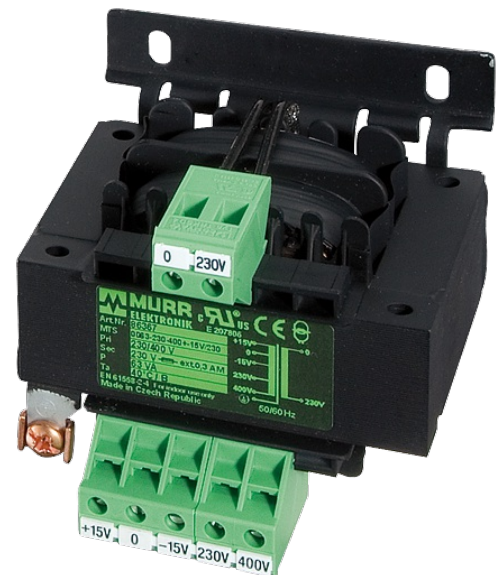

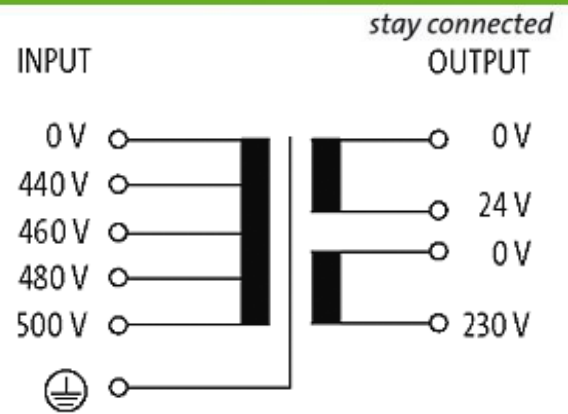

Product may differ from Image

Input

| | |
|-----------------------|--------------------------------------|
| Input voltage | 440, 460, 480, 500 V AC |
| Input current | 0.41 A (440 V AC); 0.36 A (500 V AC) |
| Inrush current | 4.2 A (440 V AC) |
| Short-circuit current | 5.4 A (440 V AC) |
| Frequency | 50...60 Hz |

General data

| | |
|--------------------------|---|
| Standards | EN 61558-2-4, EN 61558-2-6, EN 62041 category 0 |
| Test isolation voltage | 6.1 kV |
| Mounting method | Long-hole mounting |
| Dimensions H × W × D | 101×96×106 mm |
| Fixing centers a × b × c | 86.5×84×4.8 mm |
| Drill hole Ø | 4.8×8.4 mm |
| Temperature range | -20...+40 °C (storage temperature -40...+80 °C) |

Output

| | |
|----------------|-------------|
| Output voltage | 24/230 V AC |
| Output rating | 150 VA |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85043180 |
| EAN | 4048879322812 |
| eClass | 27031202 |
| Packaging unit | 1 |